



# Installing the GBICs, SFP, SFP+, XFP, CXP, or CFP Optics Modules in Cisco ONS Platforms

---

This document provides compatibility information and installation procedures for Gigabit Interface Converter (GBIC), Small Form-factor Pluggable (SFP), Enhanced Small-Form-factor Pluggable (SFP+), 10 Gbps Small Form-factor Pluggable (XFP), 120 Gbps 12x Small Form-factor Pluggable (CXP), and C Form-factor Pluggable (CFP) optical modules used with the Cisco ONS 15454 M2, Cisco ONS 15454 M6, ONS 15454, Cisco ONS 15454 SDH, Cisco ONS 15310-CL, Cisco ONS 15310-MA, Cisco ONS 15310-MA SDH, Cisco ONS 15600, and Cisco ONS 15600 SDH nodes. This document also contains removal instructions, cabling, and technical specifications. Use this document in conjunction with platform-specific Cisco user documentation when working with GBICs, SFP, SFP+, XFP, CXP, or CFP modules or any other system components.

The GBICs, SFP, SFP+, XFP, CXP, and CFP modules are referred to as pluggable port modules (PPMs) in Cisco Transport Controller (CTC).

- [Changes to This Document, page 2](#)
- [Introduction, page 3](#)
- [Compatibility by Card, page 4](#)
- [GBIC Description and Specifications, page 22](#)
- [SFP and SFP+ Description and Specifications, page 29](#)
- [XFP Description and Specifications, page 45](#)
- [CFP Description and Specifications, page 57](#)
- [CXP Description and Specifications, page 58](#)
- [NTP-G324 Install, Provision, and Delete PPMs, page 59](#)
- [Related Documentation, page 73](#)
- [Additional References, page 74](#)
- [Trademark Notice, page 75](#)
- [Obtaining Documentation and Submitting a Service Request, page 75](#)

# Changes to This Document

The following table lists new and changed content made to this document since it was first published.

**Table 1: Revision History**

Revision	Date	Change Summary
78-18174-01	August 2011	Updated the specifications for ONS-SC-OSC-ULH SFP in the section "Single-Mode Fiber SFP Port Cabling Specifications".
	September 2011	Updated the specifications for ONS-SC-OSC-ULH SFP in the section "Single-Mode Fiber SFP Port Cabling Specifications".
	November 2011	Added a footnote for the following SFPs in the section "Compatibility by Card-Cisco ONS 15454 M2, Cisco ONS 15454 M6, Cisco ONS 15454, and Cisco ONS 15454 SDH": <ul style="list-style-type: none"> <li>• ONS-SI-155-SR-MM</li> <li>• ONS-SI-622-SR-MM</li> <li>• ONS-SE-200-MM</li> <li>• 15454-SFP-200</li> <li>• ONS-SE-100-FX</li> <li>• ONS-SI-100-FX</li> </ul>
	February 2012	Added a footnote for the ONS-XC-10G-C XFP in the section "Compatibility by Card-Cisco ONS 15454 M2, Cisco ONS 15454 M6, Cisco ONS 15454, and Cisco ONS 15454 SDH".
	April 2012	Updated the section "DLP-G723 Install PPM on a Line Card".

Revision	Date	Change Summary
OL-26708-01	July 2012	<ul style="list-style-type: none"> <li>• Release 9.6.x updates: <ul style="list-style-type: none"> <li>◦ Updated the section "Compatibility by Card-Cisco ONS 15454 M2 and Cisco ONS 15454 M6 Platforms".</li> <li>◦ Updated the section "Compatibility by Card-Cisco ONS 15454 M2, Cisco ONS 15454 M6, Cisco ONS 15454, and Cisco ONS 15454 SDH".</li> <li>◦ Added the sections "CFP Description and Specifications" and "CXP Description and Specifications".</li> <li>◦ Updated the section "DLP-G723 Install PPM on a Line Card".</li> <li>◦ Updated the section "DLP-G728 Remove PPM from the Line Card".</li> </ul> </li> <li>• PPM information related to Cisco CPT 200, Cisco CPT 600, and Cisco CPT 50 units are removed from this document and can be found in the <a href="#">Installing the SFP, SFP+, and XFP Modules in Cisco CPT Platforms</a> document.</li> </ul>
	September 2012	<ul style="list-style-type: none"> <li>• Updated the specifications for ONS-XC-10G-1470 through ONS-XC-10G-1610 XFP modules in the table "XFP Specifications".</li> <li>• Updated the specifications for ONS-SC+-10G-30.3 through ONS-SC+-10G-61.4 SFP+ modules in the tables "SFP+ Specifications" and "Single-Mode Fiber SFP+ Port Cabling Specifications".</li> <li>• Updated the specifications for ONS-SC-OSC-ULH=, ONS-SC-OSC-18.0=, and ONS-SE-155-1510= SFP modules in the table "SFP Specifications".</li> </ul>

## Introduction

The GBICs, SFP, SFP+, XFP, CXP, and CFP optics modules are hot-swappable I/O devices that plug into a line card port to link the port with the fiber optic network. For all cards, the type of GBICs, SFP, SFP+, XFP, CXP, and CFP modules that is plugged into the card is displayed in Cisco Transport Controller (CTC) and in Transaction Language 1 (TL1).

**Note**

- If you are using Software R6.2, the following platforms, cards, and PPMs are not supported:
  - ONS15310-MA platform and related PPMs
  - CE1000-4 card and related PPMs
  - ONS-XC-10G-L2= PPM
  - MXP\_2.5G\_10E\_L card
  - MXP\_2.5G\_10E\_C card
  - TXP\_MR\_10E\_L card
  - TXP\_MR\_10E\_C card
  - MXP\_MR\_10DME\_C card
  - MXP\_MR\_10DME\_L card
- The ONS-SE-200-MM= PPM is not supported on the MXP\_MR\_2.5G and MXPP\_MR\_2.5G cards.

## Compatibility by Card

[Table 2: Compatibility by Card—Cisco ONS 15454 M2 and Cisco ONS 15454 M6 Platforms](#) through [Table 7: Compatibility by Card—Cisco ONS 15600 and Cisco ONS 15600 SDH](#) lists Cisco ONS 15454 M2, Cisco ONS 15454 M6, ONS 15454, Cisco ONS 15454 SDH, Cisco ONS 15310-CL, Cisco ONS 15310-MA, Cisco ONS 15310-MA SDH, Cisco ONS 15600, and Cisco ONS 15600 SDH cards with their compatible GBIC, SFP, SFP+, and XFP modules.

**Caution**

Use only those GBIC, SFP, SFP+, and XFP modules certified for use in Cisco Optical Networking Systems. The top assembly numbers (TANs) of the qualified Cisco GBIC, SFP, SFP+, and XFP modules are provided in [Table 2: Compatibility by Card—Cisco ONS 15454 M2 and Cisco ONS 15454 M6 Platforms](#) through [Table 7: Compatibility by Card—Cisco ONS 15600 and Cisco ONS 15600 SDH](#).

## PPM Compatibility by Card—Cisco ONS 15454 M2 and Cisco ONS 15454 M6

The following table lists Cisco ONS 15454 M2 and Cisco ONS 15454 M6 cards with their compatible PPMs.

Important notes for the following table:

- The ONS-SC-2G-28.7, ONS-SC-2G-33.4, ONS-SC-2G-41.3, ONS-SC-2G-49.3, and ONS-SC-2G-57.3 SFPs are supported in Cisco ONS Software Release 8.5 and later releases.
- The ONS-SC-2G-37.4, ONS-SC-2G-45.3, and ONS-SC-2G-53.3 SFPs are supported in Cisco ONS Software Release 9.4 and later releases.

**Table 2: Compatibility by Card—Cisco ONS 15454 M2 and Cisco ONS 15454 M6 Platforms**

Card Name	Compatible SFP (Cisco Product ID)	Cisco Top Assembly Number (TAN)
TNC and TNCE cards	ONS-SC-OSC-ULH=	10-2469-01
	ONS-SC-OSC-18.0=	10-2737-01
	ONS-SC-2G-28.7=	10-2307-02
	ONS-SC-2G-30.3=through ONS-SC-2G-60.6=	10-2155-02 through 10-2184-02 10-2668-01
	ONS-SC-2G-37.4=	10-2670-01
	ONS-SC-2G-45.3=	10-2669-01
	ONS-SC-2G-53.3=	
	ONS-SC-Z3-1470= through ONS-SC-Z3-1610=	10-2285-01 through 10-2292-01
	ONS-SE-155-1470= through ONS-SE-155-1610=	10-1996-01 through 10-2003-01
100G-LC-C card	ONS-CXP-100G-SR10=	10-2790-01
10x10G-LC card	ONS-SC+-10G-30.3= through ONS-SC+-10G-61.4=	10-2690-01 through 10-2729-01
	ONS-SC+-10G-SR=	10-2620-01
	ONS-SC+-10G-ER=	10-2619-01
	ONS-SC+-10G-LR=	10-2618-01
	ONS-SC+-10G-ZR=	10-2730-01
	ONS-XC-10G-EP30.3= through ONS-XC-10G-EP61.4=	10-2577-01 through 10-2612-01
CFP-LC card (ONS 15454 M6 only)	ONS-CC-100G-LR4=	10-2736-01
	ONS-CC-100GE-LR4=	10-2795-01
	ONS-CC-40G-LR4=	10-2744-01

## PPM Compatibility by Card—Cisco ONS 15454 M2, Cisco ONS 15454 M6, Cisco ONS 15454, and Cisco ONS 15454 SDH

The following table lists Cisco ONS 15454 M2, Cisco ONS 15454 M6, Cisco ONS 15454, and Cisco ONS 15454 SDH cards with their compatible PPMs.

Important notes for the following table:

- The ONS-SC-2G-28.7, ONS-SC-2G-33.4, ONS-SC-2G-41.3, ONS-SC-2G-49.3, and ONS-SC-2G-57.3 SFPs are supported in Cisco ONS Software Release 8.5 and later releases.
- The ONS-SC-2G-37.4, ONS-SC-2G-45.3, and ONS-SC-2G-53.3 SFPs are supported in Cisco ONS Software Release 9.4 and later releases.
- The LED based SFPs—ONS-SI-155-SR-MM, ONS-SE-200-MM, ONS-SI-100-FX, and 15454-SFP-200—do not support the optical power transmitted (OPT) and laser bias current (LBC) optical parameters.
- The ONS-XC-10G-S1 XFP with TAN 10-2012-02 supports 10G-1200-SM-LL-L, 10GE BASE-LR, 10GE BASE-LW, OC192 SR1, STM64 I-64.1, and OTU-2 at 10.7G. The ONS-XC-10G-S1 XFP with TAN 10-2012-03 supports 10G-1200-SM-LL-L, 10GE BASE-LR, 10GE BASE-LW, OC192 SR1, STM64 I-64.1, and OTU-2 at 10.7G, 11.05G, and 11.09G.
- The LO-TX-POWER alarm is raised and the traffic is dropped when TX and RX connectors of the ONS-XC-10G-C XFP connected to the trunk port of an OC192-XFP, ADM-10G, OTU2\_XP, GE\_XP, GE\_XPE, 10GE\_XP, 10GE\_XPE, AR-XP, or AR-MXP card are swapped. Set the trunk port to OOS,DSBLD (ANSI) or Locked,disabled (ETSI) state and then back into the IS (ANSI) or Unlocked (ETSI) state to clear the LO-TXPOWER alarm.
- Use cables having threaded coaxial connectors with ONS-SC-E3-T3-PW and ONS-SC-EOP3 SFPs to achieve a stable mechanical contact and avoid performance degradation.

**Table 3: Compatibility by Card—Cisco ONS 15454 M2, Cisco ONS 15454 M6, Cisco ONS 15454, and Cisco ONS 15454 SDH**

Card	Compatible GBIC, SFP, or XFP (Cisco Product ID)	Cisco Top Assembly Number (TAN)
MXP_2.5G_10E card	15454-SFP-OC48-IR=	10-1975-01
MXP_2.5G_10E_L card	ONS-SE-2G-S1=	10-2017-01
MXP_2.5G_10E_C card	ONS-SE-2G-L2=	10-2013-01

Card	Compatible GBIC, SFP, or XFP (Cisco Product ID)	Cisco Top Assembly Number (TAN)
	ONS-SI-2G-L1=	10-2102-02
	ONS-SI-2G-L2=	10-1990-02
	ONS-SC-2G-28.7=	10-2307-02
	ONS-SC-2G-30.3=through ONS-SC-2G-60.6=	10-2155-02 through 10-2184-02 10-2668-01
	ONS-SC-2G-37.4=	10-2670-01
	ONS-SC-2G-45.3=	10-2669-01
	ONS-SC-2G-53.3=	
MXP_MR_2.5G card MXPP_MR_2.5G card	ONS-SC-Z3-1470= through ONS-SC-Z3-1610=	10-2285-01 through 10-2292-01
	15454-SFP-GE+-LX=	10-1832-03
	15454-SFP-GEFC-SX=	10-1833-03
	ONS-SE-G2F-SX=	10-2272-02
	ONS-SE-G2F-LX=	10-2273-02
	ONS-SE-200-MM=	10-2248-01
	ONS-SE-GE-ZX=	10-2354-01
TXP_MR_10E card TXP_MR_10E_L card TXP_MR_10E_C card	ONS-SC-Z3-1470= through ONS-SC-Z3-1610=	10-2285-01 through 10-2292-01
	ONS-XC-10G-SR-MM=	10-2420-01
	ONS-XC-10G-S1=	10-2012-02, 10-2012-03
	ONS-XC-10G-I2=	10-2193-02
	ONS-XC-10G-L2= (Only when placed in slots 6, 7, 12, or 13)	10-2194-02

Card	Compatible GBIC, SFP, or XFP (Cisco Product ID)	Cisco Top Assembly Number (TAN)
TXP_MR_2.5G card TXPP_MR_2.5G card	15454-SFP3-1-IR=	10-1828-01
	15454-SFP12-4-IR=	10-1976-01
	15454-SFP-OC48-IR=	10-1975-01
	15454-SFP-200=	10-1750-01
	15454-SFP-GEFC-SX=	10-1833-02
	15454-SFP-GE+-LX=	10-1832-03
	ONS-SI-155-I1=	10-1938-02
	ONS-SI-622-I1=	10-1956-02
	ONS-SE-G2F-SX=	10-2272-02
	ONS-SE-G2F-LX=	10-2273-02
	ONS-SE-200-MM=	10-2248-01
	ONS-SE-GE-ZX=	10-2354-01
	ONS-SE-2G-S1=	10-1971-02
	ONS-SE-Z1=	10-2017-01
	ONS-SE-2G-L2=	10-2013-01
	ONS-SI-155-SR-MM=	10-2279-01
	ONS-SI-2G-S1=	10-1992-02
	ONS-SI-2G-I1=	10-1993-02
	ONS-SI-2G-L2=	10-1990-02
	ONS-SC-2G-28.7= ONS-SC-2G-30.3=through ONS-SC-2G-60.6= ONS-SC-2G-37.4= ONS-SC-2G-45.3= ONS-SC-2G-53.3=	10-2307-02 10-2155-02 through 10-2184-02 10-2668-01 10-2670-01 10-2669-01
		10-2285-01 through 10-2292-01



Card	Compatible GBIC, SFP, or XFP (Cisco Product ID)	Cisco Top Assembly Number (TAN)
	ONS-SC-Z3-1470= through ONS-SC-Z3-1610=	
MXP_MR_10DME_C card MXP_MR_10DME_L card	15454-SFP-GE+-LX=	10-1832-03
	15454-SFP-GEFC-SX=	10-1833-02
	ONS-SE-4G-MM=	10-2259-01
	ONS-SE-4G-SM=	10-2252-01
	ONS-SE-G2F-LX=	10-2273-02
	ONS-SE-G2F-SX=	10-2272-02
	ONS-SE-ZE-EL=	10-2351-01
	ONS-SI-GE-ZX=	10-2296-01
40G-MXP-C card 40E-MXP-C card 40ME-MXP-C card	ONS-XC-8G-SM=	10-2484-01
	ONS-XC-8G-MM=	10-2623-01
	ONS-XC-10G-S1=	10-2012-02, 10-2012-03
	ONS-XC-10G-I2=	10-2193-02
	ONS-XC-10G-L2=	10-2194-02
	ONS-XC-10G-C=	10-2480-01
	ONS-XC-10G-SR-MM=	10-2420-01
	ONS-XC-10G-1470= through ONS-XC-10G-1610=	10-2548-01 through 10-2557-01
	ONS-XC-10G-EP30.3= through ONS-XC-10G-EP61.4=	10-2577-01 through 10-2612-01

Card	Compatible GBIC, SFP, or XFP (Cisco Product ID)	Cisco Top Assembly Number (TAN)
ADM-10G card	ONS-SC-155-EL=	10-2363-01
	ONS-SE-Z1=	10-1971-02
	ONS-SE-G2F-LX=	10-2273-02
	ONS-SE-G2F-SX=	10-2272-02
	ONS-SC-2G-28.7=	10-2307-02
	ONS-SC-2G-30.3=through	10-2155-02 through 10-2184-02
	ONS-SC-2G-60.6=	10-2668-01
	ONS-SC-2G-37.4=	10-2670-01
	ONS-SC-2G-45.3=	10-2669-01
	ONS-SC-2G-53.3=	
	ONS-SC-Z3-1470= through ONS-SC-Z3-1610=	10-2285-01 through 10-2292-01
	ONS-SI-GE-ZX=	10-2296-01
	ONS-SI-155-L2=	10-1937-02
	ONS-SI-2G-S1=	10-1992-02
	ONS-SI-2G-I1=	10-1993-02
	ONS-SI-622-I1=	10-1956-02
	ONS-SI-2G-L2	10-1990-02
	ONS-XC-10G-I2=	10-2193-02
	ONS-XC-10G-S1=	10-2012-02, 10-2012-03
	ONS-XC-10G-C=	10-2480-01
	ONS-XC-10G-96C=	10-2789-01
	ONS-XC-10G-SR-MM=	10-2420-01
	ONS-XC-10G-30.3= through ONS-XC-10G-61.4=	10-2347-02 through 10-2309-02
	ONS-XC-10G-1470= through ONS-XC-10G-1610=	10-2548-01 through 10-2557-01
	ONS-XC-10G-EP30.3= through ONS-XC-10G-EP61.4=	10-2577-01 through 10-2612-01

Card	Compatible GBIC, SFP, or XFP (Cisco Product ID)	Cisco Top Assembly Number (TAN)
GE_XP card GE_XPE card	ONS-SC-2G-28.7=	10-2307-02
	ONS-SC-2G-30.3=through ONS-SC-2G-60.6=	10-2155-02 through 10-2184-02 10-2668-01
	ONS-SC-2G-37.4=	10-2670-01
	ONS-SC-2G-45.3=	10-2669-01
	ONS-SC-2G-53.3=	
	ONS-SC-Z3-1470= through ONS-SC-Z3-1610=	10-2285-01 through 10-2292-01
	ONS-SC-EOP1= (GE_XPE only)	30-1446-01
	ONS-SC-EOP3= (GE_XPE only)	30-1449-01
	ONS-SC-E1-T1-PW= (GE_XPE only)	30-1447-01
	ONS-SC-E3-T3-PW= (GE_XPE only)	30-1450-01
	ONS-SI-100-LX10= (GE_XPE only)	10-2294-01
	ONS-SI-100-FX= (GE_XPE only)	10-2350-01
	ONS-SI-GE-ZX=	10-2296-01
	ONS-SE-G2F-LX=	10-2273-02
	ONS-SE-G2F-SX=	10-2272-02
	ONS-SE-GE-BXD=	10-2482-01
	ONS-SE-GE-BXU=	10-2481-01
	ONS-SE-ZE-EL=	10-2351-01
	ONS-XC-10G-S1=	10-2012-02, 10-2012-03
	ONS-XC-10G-I2=	10-2193-02
	ONS-XC-10G-C=	10-2480-01
	ONS-XC-10G-96C=	10-2789-01
	ONS-XC-10G-SR-MM=	10-2420-01
	ONS-XC-10G-30.3= through ONS-XC-10G-61.4=	10-2347-02 through 10-2309-02

Card	Compatible GBIC, SFP, or XFP (Cisco Product ID)	Cisco Top Assembly Number (TAN)
	ONS-XC-10G-1470= through ONS-XC-10G-1610=	10-2548-01 through 10-2557-01
	ONS-XC-10G-EP30.3= through ONS-XC-10G-EP61.4=	10-2577-01 through 10-2612-01
10GE_XP card 10GE_XPE card	ONS-XC-10G-C=	10-2480-01
	ONS-XC-10G-96C=	10-2789-01
	ONS-XC-10G-S1=	10-2012-02, 10-2012-03
	ONS-XC-10G-I2=	10-2193-02
	ONS-XC-10G-L2=	10-2194-02
	ONS-XC-10G-SR-MM=	10-2420-01
	ONS-XC-10G-30.3= through ONS-XC-10G-61.4=	10-2347-02 through 10-2309-02
	ONS-XC-10G-1470= through ONS-XC-10G-1610=	10-2548-01 through 10-2557-01
OTU2-XP card	ONS-XC-10G-EP30.3= through ONS-XC-10G-EP61.4=	10-2577-01 through 10-2612-01
	ONS-XC-10G-C=	10-2480-01
	ONS-XC-10G-96C=	10-2789-01
	ONS-XC-10G-S1=	10-2012-02, 10-2012-03
	ONS-XC-10G-I2=	10-2193-02
	ONS-XC-10G-L2=	10-2194-02
	ONS-XC-10G-SR-MM=	10-2420-01
	ONS-XC-10G-30.3= through ONS-XC-10G-61.4=	10-2347-02 through 10-2309-02
	ONS-XC-10G-1470= through ONS-XC-10G-1610=	10-2548-01 through 10-2557-01
	ONS-XC-10G-EP30.3= through ONS-XC-10G-EP61.4=	10-2577-01 through 10-2612-01

Card	Compatible GBIC, SFP, or XFP (Cisco Product ID)	Cisco Top Assembly Number (TAN)
AR-MXP card AR-XP card	ONS-SC-155-EL=	10-2363-01
	ONS-SI-155-SR-MM=	10-2279-01
	ONS-SI-155-I1=	10-1938-02
	ONS-SI-155-L2=	10-1937-02
	ONS-SI-622-I1=	10-1956-02
	ONS-SI-2G-S1=	10-1992-02
	ONS-SI-2G-L1=	10-2102-02
	ONS-SI-2G-L2=	10-1990-02
	ONS-SE-Z1=	10-1971-02
	ONS-SE-ZE-EL=	10-2351-01
	ONS-SI-GE-ZX=	10-2296-01
	ONS-SE-GE-BXU=	10-2481-01
	ONS-SE-GE-BXD=	10-2482-01
	ONS-SI-100-LX10=	10-2294-01
	ONS-SI-100-FX=5	10-2350-01
	ONS-SE-200-MM=	10-2248-01
	ONS-SE-4G-MM=	10-2259-01
	ONS-SE-4G-SM=	10-2252-01
	ONS-SE-155-1470= through ONS-SE-155-1610=	10-1996-01 through 10-2003-01
	ONS-SC-2G-28.7= ONS-SC-2G-30.3=through ONS-SC-2G-60.6= ONS-SC-2G-37.4= ONS-SC-2G-45.3= ONS-SC-2G-53.3=	10-2307-02 10-2155-02 through 10-2184-02 10-2668-01 10-2670-01 10-2669-01

Card	Compatible GBIC, SFP, or XFP (Cisco Product ID)	Cisco Top Assembly Number (TAN)
	ONS-SC-HD3GV-TX=	10-2630-01
	ONS-SC-HD3GV-RX=	10-2629-01
	ONS-XC-10G-S1=	10-2012-02, 10-2012-03
	ONS-XC-10G-I2=	10-2193-02
	ONS-XC-10G-L2=	10-2194-02
	ONS-XC-8G-SM=	10-2484-01
	ONS-XC-8G-MM=	10-2623-01
	ONS-XC-10G-EP30.3= through ONS-XC-10G-EP61.4=	10-2577-01 through 10-2612-01
	ONS-XC-10G-C=	10-2480-01
	ONS-XC-10G-96C=	10-2789-01

## PPM Compatibility by Card—Cisco ONS 15454 and Cisco ONS 15454 SDH

The following table lists Cisco ONS 15454 and Cisco ONS 15454 SDH cards with their compatible PPMs.

Important notes for the following table:

- The G1000-4 cards support coarse wavelength division multiplexing (CWDM) and dense wavelength division multiplexing (DWDM) GBICs. The G1K-4 cards with the Common Language Equipment Identification (CLEI) code of WM5IRWPCAA (manufactured after August 2003) support CWDM and DWDM GBICs. The G1K-4 cards manufactured prior to August 2003 do not support CWDM or DWDM GBICs.
- The xx.x in 15454-GBIC-xx.x defines the 32 possible wavelengths as shown in the [Table 12: Supported Wavelengths for DWDM GBICs](#). For example, a 1530.33 nm DWDM wavelength is represented as 30.3.
- The xxxx in 15454-GBIC-xxxx defines the 8 possible wavelengths as shown in the [Table 11: Supported Wavelengths for CWDM GBICs](#). For example, a 1470 nm CWDM wavelength is represented as 1470.
- The LED based SFPs—ONS-SE-100-FX, ONS-SI-100-FX, ONS-SI-155-SR-MM, and ONS-SI-622-SR-MM—do not support the optical power transmitted (OPT) and laser bias current (LBC) optical parameters.
- The ONS-SC-2G-28.7, ONS-SC-2G-33.4, ONS-SC-2G-41.3, ONS-SC-2G-49.3, and ONS-SC-2G-57.3 SFPs are supported in Cisco ONS Software Release 8.5 and later releases.
- The ONS-SC-2G-37.4, ONS-SC-2G-45.3, and ONS-SC-2G-53.3 SFPs are supported in Cisco ONS Software Release 9.4 and later releases.

- The ONS-SC-155-EL is supported only on ONS 15454 SDH. The ONS-SC-155-EL is not supported on the MRC-4 card.
- The OC192SR1/STM64IO Short Reach/10G-SR1/OC192/STM64 Any Reach/10G-XR card is designated as OC192-XFP or STM64 XFP in CTC.
- The LO-TX-POWER alarm is raised and the traffic is dropped when TX and RX connectors of the ONS-XC-10G-C XFP connected to the trunk port of an OC192-XFP, ADM-10G, OTU2\_XP, GE\_XP, GE\_XPE, 10GE\_XP, 10GE\_XPE, AR-XP, or AR-MXP card are swapped. Set the trunk port to OOS,DSBLD (ANSI) or Locked,disabled (ETSI) state and then back into the IS (ANSI) or Unlocked (ETSI) state to clear the LO-TXPOWER alarm.
- The ONS-XC-10G-S1 XFP with TAN 10-2012-02 supports 10G-1200-SM-LL-L, 10GE BASE-LR, 10GE BASE-LW, OC192 SR1, STM64 I-64.1, and OTU-2 at 10.7G. The ONS-XC-10G-S1 XFP with TAN 10-2012-03 supports 10G-1200-SM-LL-L, 10GE BASE-LR, 10GE BASE-LW, OC192 SR1, STM64 I-64.1, and OTU-2 at 10.7G, 11.05G, and 11.09G.

**Table 4: Compatibility by Card—Cisco ONS 15454 and Cisco ONS 15454 SDH**

Card	Compatible GBIC, SFP, or XFP (Cisco Product ID)	Cisco Top Assembly Number (TAN)
E1000-2-G card (ONS 15454 SONET only) E1000-2 card	ONS-GC-GE-SX=	10-2192-01
	ONS-GC-GE-LX=	10-2191-01
G1K-4 card G1000-4 card	15454-GBIC-xx.x=	10-1845-01 through 10-1876-01
	15454-GBIC-xxxx=	10-1453-01 through 10-1460-01
	ONS-GC-GE-SX=	10-2192-01
	ONS-GC-GE-LX=	10-2191-01
	ONS-GC-GE-ZX=	10-2190-01
ML1000-2 card	15454-SFP-LC-SX=	30-1301-01
	15454-SFP-LC-LX/LH=	30-1299-01
	ONS-SC-GE-LX=	10-2298-01
	ONS-SC-GE-SX=	10-2301-01
	ONS-SI-GE-LX=	10-2300-01
	ONS-SI-GE-SX=	10-2295-01
	ONS-SI-GE-ZX	10-2296-01

Card	Compatible GBIC, SFP, or XFP (Cisco Product ID)	Cisco Top Assembly Number (TAN)
ML100X-8 card CE-100T-8 card (ONS 15454 SDH)	ONS-SE-100-FX=	10-2212-01
	ONS-SE-100-LX10=	10-2213-01
	ONS-SI-100-LX10=	10-2294-01
	ONS-SI-100-FX=	10-2350-01
	ONS-SE-100-BX10D=	10-2352-01
	ONS-SE-100-BX10U=	10-2353-01
CE-1000-4 card	ONS-GC-GE-SX=	10-2192-01
	ONS-GC-GE-LX=	10-2191-01
	ONS-GC-GE-ZX=	10-2190-01
ML-MR-10 card CE-MR-10 card	ONS-SE-ZE-EL=	10-2351-01
	ONS-SI-GE-SX=	10-2295-01
	ONS-SI-GE-LX=	10-2300-01
	ONS-SI-GE-ZX=	10-2296-01
	ONS-SI-100-LX10=	10-2294-01
	ONS-SI-100-FX=	10-2350-01
	ONS-SE-100-BX10D=	10-2352-01
	ONS-SE-100-BX10U=	10-2353-01
	ONS-SC-2G-28.7=	10-2307-02
	ONS-SC-2G-30.3=through ONS-SC-2G-60.6=	10-2155-02 through 10-2184-02 10-2668-01
	ONS-SC-2G-37.4= ONS-SC-2G-45.3= ONS-SC-2G-53.3=	10-2670-01 10-2669-01
	ONS-SC-Z3-1470= through ONS-SC-Z3-1610=	10-2285-01 through 10-2292-01



Card	Compatible GBIC, SFP, or XFP (Cisco Product ID)	Cisco Top Assembly Number (TAN)
FC_MR-4 card	ONS-GX-2FC-MMI=	10-2015-01
	ONS-GX-2FC-SML=	10-2016-01

Card	Compatible GBIC, SFP, or XFP (Cisco Product ID)	Cisco Top Assembly Number (TAN)
MRC-4 card MRC-12 card MRC-12-2.5G card	ONS-SI-155-I1=	10-1938-02
	ONS-SI-155-L1=	10-1957-02
	ONS-SI-155-L2=	10-1937-02
	ONS-SI-2G-S1=	10-1992-02
	ONS-SI-2G-I1=	10-1993-02
	ONS-SI-2G-L1=	10-2102-02
	ONS-SI-2G-L2=	10-1990-02
	ONS-SI-622-I1=	10-1956-02
	ONS-SI-622-L1=	10-1958-02
	ONS-SI-622-L2=	10-1936-02
	ONS-SI-155-SR-MM=	10-2279-01
	ONS-SI-622-SR-MM=	10-2280-01
	ONS-SC-155-EL=	10-2363-01
	ONS-SC-Z3-1470= through ONS-SC-Z3-1610=	10-2285-01 through 10-2292-01
	ONS-SC-2G-28.7= ONS-SC-2G-30.3=through ONS-SC-2G-60.6= ONS-SC-2G-37.4= ONS-SC-2G-45.3= ONS-SC-2G-53.3=	10-2307-02 10-2155-02 through 10-2184-02 10-2668-01 10-2670-01 10-2669-01
	ONS-SE-622-1470= through ONS-SE-622-1610=	10-2004-01 through 10-2011-01
	ONS-SE-155-1470= through ONS-SE-155-1610=	10-1996-01 through 10-2003-01
	ONS-SE-Z1=	10-1971-02
OC192SR1/STM64IO Short Reach/10G-SR1 card	ONS-XC-10G-S1=	10-2012-02, 10-2012-03

Card	Compatible GBIC, SFP, or XFP (Cisco Product ID)	Cisco Top Assembly Number (TAN)
OC192/STM64 Any Reach/10G-XR card	ONS-XC-10G-C=	10-2480-01
	ONS-XC-10G-S1=	10-2012-02, 10-2012-03
	ONS-XC-10G-I2=	10-2193-02
	ONS-XC-10G-L2=	10-2194-02
	ONS-XC-10G-30.3= through ONS-XC-10G-61.4=	10-2347-02 through 10-2317-02
	ONS-XC-10G-EP30.3= through ONS-XC-10G-EP61.4=	10-2577-01 through 10-2612-01
MXP_2.5G_10G card	15454-SFP-OC48-IR=	10-1975-01
	ONS-SE-2G-S1=	10-2017-01

## PPM Compatibility by Card—Cisco ONS 15310-MA and Cisco ONS 15310-MA SDH

The following table lists Cisco ONS 15310-MA and Cisco ONS 15310-MA SDH cards with their compatible PPMs.

Important notes for the following table:

- The LED based SFPs—ONS-SI-155-SR-MM and ONS-SI-100-FX—do not support the optical power transmitted (OPT) and laser bias current (LBC) optical parameters.
- The ONS-SC-155-EL is supported only on ONS 15310-MA SDH.
- The ONS-SC-2G-28.7, ONS-SC-2G-33.4, ONS-SC-2G-41.3, ONS-SC-2G-49.3, and ONS-SC-2G-57.3 SFPs are supported in Cisco ONS Software Release 8.5 and later releases.
- The ONS-SC-2G-37.4, ONS-SC-2G-45.3, and ONS-SC-2G-53.3 SFPs are supported in Cisco ONS Software Release 9.4 and later releases.
- Due to mechanical constraints related to the dimensions of the pluggable device, two ONS-SE-ZE-EL copper SFPs cannot be inserted in the same SFP double cage receptacle. They can only be inserted into slots 1 or 2, 3 or 4, and 5 or 6. Up to three ONS-SE-ZE-EL copper SFPs can be inserted in one CE-MR-6 card.

**Table 5: Compatibility by Card—Cisco ONS 15310-MA and Cisco ONS 15310-MA SDH**

Card	Compatible GBIC, SFP, or XFP (Cisco Product ID)	Cisco Top Assembly Number (TAN)
CTX2500 card	ONS-SI-155-I1=	10-1938-02
	ONS-SI-155-L1=	10-1957-02
	ONS-SI-155-L2=	10-1937-02
	ONS-SI-155-SR-MM=	10-2279-01
	ONS-SC-155-EL=	10-2363-01
	ONS-SI-622-I1=	10-1956-02
	ONS-SI-622-L1=	10-1958-02
	ONS-SI-622-L2=	10-1936-02
	ONS-SI-2G-I1=	10-1993-02
	ONS-SI-2G-L1=	10-2102-02
	ONS-SI-2G-S1=	10-1992-02
	ONS-SI-2G-L2=	10-1990-02
	ONS-SE-Z1=	10-1971-02
	ONS-SE-155-1470= through ONS-SE-155-1610=	10-1996-01 through 10-2003-01
	ONS-SE-622-1470= through ONS-SE-622-1610=	10-2004-01 through 10-2011-01
	ONS-SC-2G-28.7=	10-2307-02
	ONS-SC-2G-30.3=through ONS-SC-2G-60.6=	10-2155-02 through 10-2184-02 10-2668-01
	ONS-SC-2G-37.4=	10-2670-01
	ONS-SC-2G-45.3=	10-2669-01
	ONS-SC-2G-53.3=	
	ONS-SE-2G-1470= through ONS-SE-2G-1610=	10-2461-01 through 10-2468-01

Card	Compatible GBIC, SFP, or XFP (Cisco Product ID)	Cisco Top Assembly Number (TAN)
CE-MR-6 card	ONS-SE-ZE-EL=	10-2351-01
	ONS-SI-GE-SX	10-2295-01
	ONS-SI-GE-LX	10-2300-01
	ONS-SI-GE-ZX	10-2296-01
	ONS-SI-100-LX10=	10-2294-01
	ONS-SI-100-FX=	10-2350-01
	ONS-SE-100-BX10D=	10-2350-01
	ONS-SE-100-BX10U=	10-2353-01

## PPM Compatibility by Card—Cisco ONS 15310-CL

The following table lists Cisco ONS 15310-CL cards with their compatible PPMs.

**Table 6: Compatibility by Card—Cisco ONS 15310-CL**

Card	Compatible GBIC, SFP, or XFP (Cisco Product ID)	Cisco Top Assembly Number (TAN)
15310-CL-CTX card	ONS-SI-155-I1=	10-1938-02
	ONS-SI-155-L1=	10-1957-02
	ONS-SI-155-L2=	10-1937-02
	ONS-SI-622-I1=	10-1956-02
	ONS-SI-622-L1=	10-1958-02
	ONS-SI-622-L2=	10-1936-02
	ONS-SE-155-1470= through ONS-SE-155-1610=	10-1996-01 through 10-2003-01
	ONS-SE-622-1470= through ONS-SE-622-1610=	10-2004-01 through 10-2011-01

## PPM Compatibility by Card—Cisco ONS 15600 and Cisco ONS 15600 SDH

The following table lists Cisco ONS 15600 and Cisco ONS 15600 SDH cards with their compatible PPMs.

Important note for the following table:

- The ONS-XC-10G-S1 XFP with TAN 10-2012-02 supports 10G-1200-SM-LL-L, 10GE BASE-LR, 10GE BASE-LW, OC192 SR1, STM64 I-64.1, and OTU-2 at 10.7G. The ONS-XC-10G-S1 XFP with TAN 10-2012-03 supports 10G-1200-SM-LL-L, 10GE BASE-LR, 10GE BASE-LW, OC192 SR1, STM64 I-64.1, and OTU-2 at 10.7G, 11.05G, and 11.09G.

**Table 7: Compatibility by Card—Cisco ONS 15600 and Cisco ONS 15600 SDH**

Card	Compatible GBIC, SFP, or XFP (Cisco Product ID)	Cisco Top Assembly Number (TAN)
ASAP 4PIO card	ONS-SE-2G-L2=	10-2013-01
	ONS-SE-Z1=	10-1971-02
	ONS-SI-622-L2=	10-1936-02
	ONS-SI-155-L2=	10-1937-02
	ONS-SI-2G-I1=	10-1993-02
	ONS-SI-2G-L2=	10-1990-02
	ONS-SI-2G-S1=	10-1992-02
	ONS-SC-2G-30.3= through ONS-SC-2G-60.6=	10-2155-02 through 10-2184-02
ASAP 1PIO card	ONS-XC-10G-S1=	10-2012-02, 10-2012-03
	ONS-XC-10G-I2=	10-2193-02
	ONS-XC-10G-L2=	10-2194-02
	ONS-XC-10G-30.3= through ONS-XC-10G-61.4=	10-2347-02 through 10-2309-02

## GBIC Description and Specifications

GBICs are integrated fiber-optic transceivers that provide high speed serial links from a port or slot to the network. Various latching mechanisms can be utilized on the GBICs. There is no correlation between the type of latch and the model type (such as SX or LX/LH) or technology type (such as Gigabit Ethernet). See the label on the GBIC for technology type and model. One GBIC model has two clips (one on each side of the

GBIC) that secure the GBIC in the slot on the Ethernet card; the other has a locking handle. Both types are shown in [Figure 1: GBICs with Clips \(Left\) and with a Handle \(Right\)](#), on page 23.

GBIC dimensions are:

- Height 0.39 inches (1 cm)
- Width 1.18 inches (3 cm)
- Depth 2.56 inches (6.5 cm)

GBIC temperature ranges are:


- COM—Commercial operating temperature range between 23 degrees Fahrenheit to 158 degrees Fahrenheit (-5 degrees Celsius to 70 degrees Celsius)
- EXT—Extended operating temperature range between 23 degrees Fahrenheit to 185 degrees Fahrenheit (-5 degrees Celsius to 85 degrees Celsius)
- IND—Industrial operating temperature range between -40 degrees Fahrenheit to 185 degrees Fahrenheit (-40 degrees Celsius to 85 degrees Celsius)



#### Caution

Do not add labels or markings to the GBICs.

**Figure 1: GBICs with Clips (Left) and with a Handle (Right)**

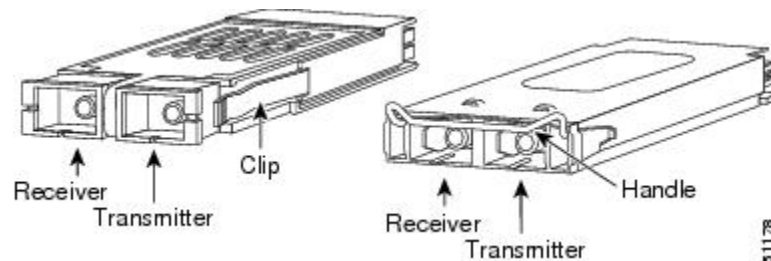

## GBIC Specifications

The following table lists specifications for available GBICs (non-DWDM/CWDM). See the section [DWDM and CWDM GBICs](#), on page 26 for descriptions and specifications for DWDM and CWDM GBICs.

Important notes for the following table:

- Operating temperature range for a card with CWDM/DWDM GBICs—15454-GBIC-xx.x and 15454-GBIC-xxxx—installed is limited to -5 to +40 degrees Celsius. Operation with CWDM/DWDM GBICs requires R4.1 or later version of G1K-4 hardware, with CLEI Code WM5IRWPCAA.

**Table 8: GBIC Specifications**

<b>GBIC</b>	<b>Interface</b>	<b>Transmitter Output Power Min/Max (dBm)</b>	<b>Receiver Input Power Min/Max (dBm)</b>
15454-GC-GE-SX= Short Reach	Gigabit Ethernet Fibre Channel, 1 Gbps	-9.5 to -4	-17 to 0
15454-GC-GE-LX=Long Reach	Gigabit Ethernet Fibre Channel, 1 Gbps	-9.5 to -3	-19 to -3
15454-GC-GE-ZX= Extended Reach	Gigabit Ethernet	0 to 5	-23 to -3
15454-GBIC-xx.x= / 15454E-GBIC-xx.x= DWDM	Gigabit Ethernet	0 to +3	-28 to -7
15454-GBIC-xxxx= / 15454E-GBIC-xxxx= CWDM	Gigabit Ethernet	1 to 5	-29 to -7
15454-GBIC-LX= / 15454E-GBIC-LX=	1000Base-LX, SC, SM, or MM	-9.5 to -3	-19 to -3
15454-GBIC-SX= / 15454E-GBIC-SX=	1000Base-SX, SC, or MM	-9.5 to 0	-17 to -0
15454-GBIC-LX/LH= / 15454E-GBIC-LX/LH=	1000Base-LX, SC, SM, or MM	-9.5 to -3	-19 to -3
15454-GBIC-ZX= / 15454E-GBIC-ZX=	1000Base-ZX, SM	-5 to 0	-23 to -3
ONS-GX-2FC-MMI= Short Reach	Fibre Channel, 1 or 2 Gbps	-9.5 to -5	-17 to 0
ONS-GX-2FC-SML= Long Reach	Fibre Channel, 1 or 2 Gbps	-9 to -3	-18 to -3

## Single-Mode Fiber GBIC Port Cabling Specifications

The following table provides cabling specifications for single-mode fiber (SMF) GBICs that you install into Ethernet cards. All GBIC ports have SC-type connectors and the minimum cable distance for all GBICs listed is 6.5 feet (2 m).

Important notes for the following table:



- The 15454-GC-GE-ZX GBIC operates on SMF optic link spans of up to 49.7 miles (80 km) in length. Link spans of up to 62.1 miles (100 km) are possible using premium SMF or dispersion shifted SMF. When shorter distances of SMF are used, it might be necessary to insert an in-line optical attenuator in the link, to avoid overloading the receiver. For fiber-optic cable spans less than 15.5 miles (25 km), insert a 10 dB in-line optical attenuator between the fiber-optic cable plant and the receiving port on the 15454-GC-GE-ZX GBIC at each end of the link. For fiber-optic cable spans equal to or greater than 15.5 miles (25 km) and less than 31 miles (50 km), insert a 5 dB in-line optical attenuator between the fiber-optic cable plant and the receiving port on the 15454-GC-GE-ZX GBIC at the end of the link.
- Typical loss on a 1310 nm wavelength SMF is 0.5 dB/km.
- Typical loss on a 1550 nm wavelength SMF is 0.3 dB/km.
- The 15454-GC-GE-ZX GBIC requires dispersion-shifted SMF for 100 km (62.1 miles) cable distance.

**Table 9: Single-Mode Fiber GBIC Port Cabling Specifications**

GBIC	Wavelength	Fiber Type	Cable Distance
15454-GBIC-xx.x= 15454E-GBIC-xx.x= DWDM	See <a href="#">Table 12: Supported Wavelengths for DWDM GBICs</a>	9 micron SMF	100 to 120 km (unamplified) (62 to 74.5 miles)  Up to 300 km (amplified) (Up to 186.4 miles)
15454-GBIC-xxxx= 15454E-GBIC-xxxx= CWDM	See <a href="#">Table 11: Supported Wavelengths for CWDM GBICs</a>	9 micron SMF	100 to 120 km (62 to 74.5 miles)
15454-GC-GE-LX= Long Reach	1310 nm	9 micron SMF	10 km (6.2 miles)
		50 micron SMF	550 m (1804 ft)
		62.5 micron SMF	275 m (902.2 ft)
15454-GC-GE-ZX= Extended Reach	1550 nm	9 micron SMF	70 to 100 km (43.4 to 62 miles)
ONS-GX-2FC-SML= Long Reach	1310 nm	9 micron SMF	10 km (6.2 miles)

## Multimode Fiber GBIC Port Cabling Specifications

[Table 10: Multimode Fiber GBIC Port Cabling Specifications](#) provides cabling specifications for multimode fiber (MMF) GBICs that you install into Ethernet cards. All GBIC ports have SC-type connectors and the minimum cable distance for all GBICs listed is 6.5 feet (2 m).

Important notes for [Table 10: Multimode Fiber GBIC Port Cabling Specifications](#):

- The numbers given for MMF refer to the core diameter. For SMF, 8.3 micron refers to the core diameter. The 9-micron and 10-micron values refer to the mode-field diameter (MFD), which is the diameter of the light-carrying portion of the fiber. This area consists of the fiber core and a small portion of the surrounding cladding. The MFD is a function of the core diameter, the wavelength of the laser, and the refractive index difference between the core and the cladding.
- When using an LX/LH GBIC with 62.5-micron diameter MMF, you must install a mode-conditioning patchcord (CAB-GELX-625 or equivalent) between the GBIC and the MMF cable on both the transmit and receive ends of the link. The mode-conditioning patchcord is required for link distances less than 328 feet (100 m) or greater than 984 feet (300 m). The mode-conditioning patchcord prevents overdriving the receiver for short lengths of MMF and reduces differential mode delay for long lengths of MMF.

**Table 10: Multimode Fiber GBIC Port Cabling Specifications**

GBIC	Wavelength	Fiber Type	Cable Distance
15454-GC-GE-SX= Short Reach	850 nm	62.5 micron MMF	220 m (722 ft) 275 m (902 ft)
		50 micron MMF	500 m (1640 ft) 550 m (1804 ft)
15454-GC-GE-LX= Long Reach	1310 nm	62.5 micron MMF	550 m (1804 ft)
		50 micron MMF	550 m (1804 ft)
ONS-GX-2FC-MMI= Short Reach	850 nm	62.5 micron MMF	550 m (1804 ft)
		50 micron MMF	300 m (984.3 ft)

## DWDM and CWDM GBICs

DWDM GBICs (15454-GBIC-xx.x and 15454E-GBIC-xx.x) and CWDM GBICs (15454-GBIC-xxxx and 15454E-GBIC-xxxx) are both WDM technologies that operate over single-mode fibers with SC (subscription channel) connectors. Cisco CWDM GBIC technology uses a 20-nm wavelength grid and Cisco ONS 15454 DWDM GBIC technology uses a 0.8-nm wavelength grid. CTC displays the specific wavelengths of the installed CWDM or DWDM GBICs. DWDM wavelengths are spaced closer together and require more precise lasers than the CWDM. The DWDM spectrum allows for optical signal amplification.

The ONS 15454 SONET/SDH-supported CWDM GBICs reach up to 100 to 120 km over single-mode fiber and can support eight wavelengths as shown in the following table.

**Table 11: Supported Wavelengths for CWDM GBICs**

CWDM GBIC Wavelengths	1470 nm	1490 nm	1510 nm	1530 nm	1550 nm	1570 nm	1590 nm	1610 nm

<b>Corresponding GBIC Colors</b>	Gray	Violet	Blue	Green	Yellow	Orange	Red	Brown
<b>Band</b>	47	49	51	53	55	57	59	61

The ONS 15454 SONET/SDH-supported DWDM GBICs reach up to 100 to 120 km over single-mode fiber and can support 32 different wavelengths at 100-GHz spacing in the C band (see the following table). These wavelengths are compatible with Cisco DWDM filters, such as ONS 15454 MSTP and ONS 15216 FlexLayer. Paired with optical amplifiers, such as the Cisco ONS 15216 EDFA3, the DWDM GBICs allow maximum unregenerated spans of approximately 186.3 miles (300 km).

**Table 12: Supported Wavelengths for DWDM GBICs**


<b>Blue Band</b>	1530.33 nm	1531.12 nm	1531.90 nm	1532.68 nm	1534.25 nm	1535.04 nm	1535.82 nm	1536.61 nm
	1538.19 nm	1538.98 nm	1539.77 nm	1540.56 nm	1542.14 nm	1542.94 nm	1543.73 nm	1544.53 nm
<b>Red Band</b>	1546.12 nm	1546.92 nm	1547.72 nm	1548.51 nm	1550.12 nm	1550.92 nm	1551.72 nm	1552.52 nm
	1554.13 nm	1554.94 nm	1555.75 nm	1556.55 nm	1558.17 nm	1558.98 nm	1559.79 nm	1560.61 nm

## Placement of CWDM or DWDM GBICs

CWDM or DWDM GBICs come in set wavelengths and are not provisionable. The wavelengths are printed on each GBIC, for example, CWDM-GBIC-1490. The user must insert the specific GBIC transmitting the

wavelength required to match the input of the CWDM/DWDM device for successful operation (as shown in the following figure). Follow your site plan or network diagram for the required wavelengths.

**Figure 2: CWDM GBIC with Wavelength Appropriate for Fiber-Connected Device**

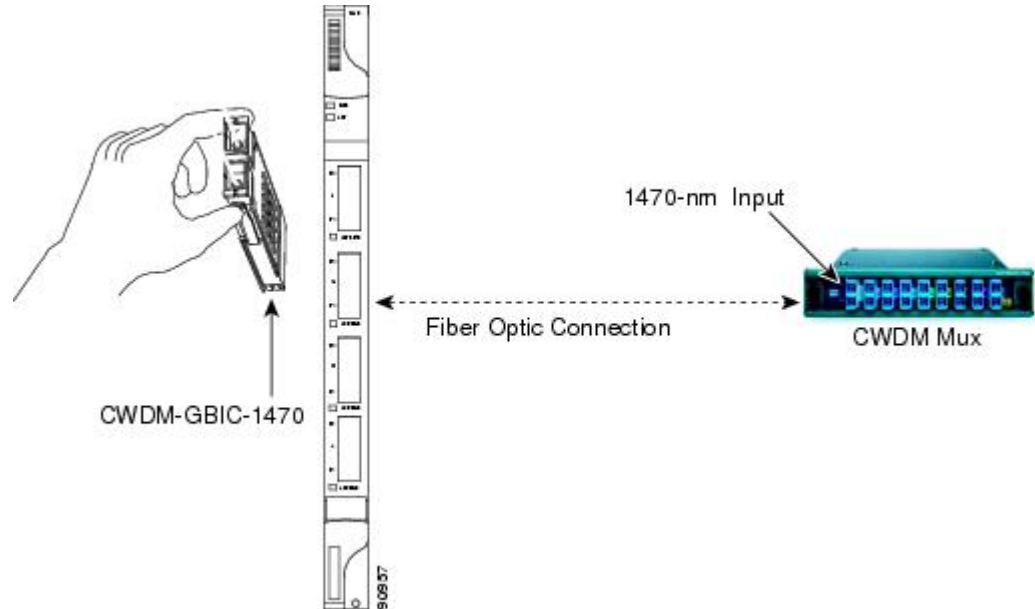


The [DLP-G723 Install PPM on a Line Card](#), on page 62 task contains specific procedure for installing GBICs and [DLP-G724 Connecting Single-Mode and Multimode Optical Fiber](#), on page 67 task contains specific procedure for attaching optical fiber to GBICs.

## Example of CWDM or DWDM GBIC Application

A G-Series card equipped with CWDM or DWDM GBICs supports the delivery of unprotected Gigabit Ethernet service in Metro DWDM applications (as shown in the following figure). It can be used in short-haul and long-haul applications.

**Figure 3: G-Series with CWDM/DWDM GBICs in Cable Network**

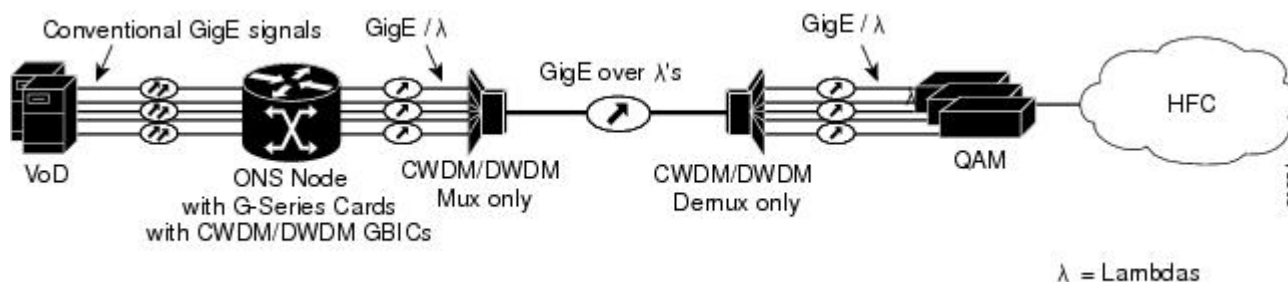

## SFP and SFP+ Description and Specifications

The SFP modules are integrated fiber optic transceivers that provide high speed serial links from a port or slot to the network. The SFP+ transceiver is an enhancement over the SFP optics developed for 1 Gbps Ethernet and 1 Gbps, 2 Gbps, and 4 Gbps Fibre Channel. The SFP+ modules extend the data rate up to 11.10 Gbps. SFP+ modules also provide 2-wire serial, I2C interface. The I2C interface is used for serial ID, digital diagnostics, and module control functions.

Various latching mechanisms can be utilized on the SFP and SFP+ modules. There is no correlation between the type of latch and the model type (such as SX or LX/LH) or technology type (such as Gigabit Ethernet). See the label on the SFP and SFP+ modules for technology type and model. One type of latch available is a mylar tab as shown in [Figure 4: Mylar Tab SFP](#), a second type of latch is an actuator/button ([Figure 5: Actuator/Button SFP](#)), and the third type of latch is a bail clasp ([Figure 6: Bail Clasp SFP](#) and [Figure 7: Wide Bail Clasp SFP](#)).

SFP and SFP+ module dimensions are:

- Height 0.33 inches (8.5 mm)
- Width 0.53 inches (13.4 mm)
- Depth 2.22 inches (56.5 mm)


SFP and SFP+ module temperature ranges are:

- COM—Commercial operating temperature range between 23 degrees Fahrenheit to 158 degrees Fahrenheit (–5 degrees Celsius to 70 degrees Celsius)
- EXT—Extended operating temperature range between 23 degrees Fahrenheit to 185 degrees Fahrenheit (–5 degrees Celsius to 85 degrees Celsius)
- IND—Industrial operating temperature range between –40 degrees Fahrenheit to 185 degrees Fahrenheit (–40 degrees Celsius to 85 degrees Celsius)


**Caution**

Do not add labels or markings to the SFP and SFP+ modules.


**Figure 4: Mylar Tab SFP**

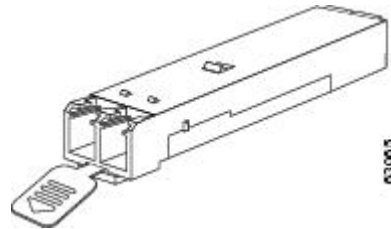


**Figure 5: Actuator/Button SFP**



**Figure 6: Bail Clasp SFP**

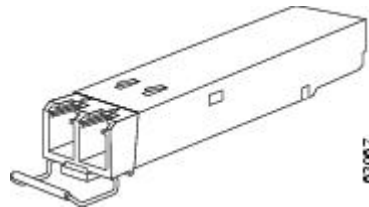

**Figure 7: Wide Bail Clasp SFP**



## SFP Specifications

The following table lists specifications for available SFPs.

Important notes for the following table:

- The ONS-SC-2G-28.7, ONS-SC-2G-33.4, ONS-SC-2G-41.3, ONS-SC-2G-49.3, and ONS-SC-2G-57.3 SFPs are supported in Cisco ONS Software Release 8.5 and later releases.

- The ONS-SC-2G-28.7= through ONS-SC-2G-60.6= SFPs on the TNC and TNCE cards support only GE payload.
- The LED based SFPs ( ONS-SI-100-FX) do not support the optical power transmitted (OPT) and laser bias current (LBC) optical parameters.
- For ONS-SE-4G-SM SFP, specified Optical Modulation Amplitude (OMA) at 4.25 Gbps is equal to an average power of -7.3 dBm at an ER of 9 dB (transmitter output power) and specified OMA at 4.25 Gbps is equal to an average power of -17.3 dBm at an ER of 9 dB (receiver power input).
- For ONS-SE-2G-30.3 through ONS-SE-2G-60.6 SFPs, the power limited performance at bit error rate (BER) = 10e-12 with SONET framed PRBS23, optical signal-to-noise ratio (OSNR) of 21 dB, 0.1 nm bandwidth (BW) and power limited performance at BER = 10e-12 with SONET framed PRBS23, OSNR of 16 dB, 0.1 nm BW.

**Table 13: SFP Specifications**

SFP	Interface	Transmitter Output Power Min/Max (dBm)	Receiver Input Power Min/Max (dBm)
ONS-SC-2G-28.7= through ONS-SC-2G-60.6=	OC-48, STM-16, GE	0 to +4	-28 to -9
ONS-SC-4G-30.3= through ONS-SC-4G-61.4=	4G FC	0 to +4	-28 to -9
ONS-SE-100-FX=	100 Mbps long reach - 1310 nm - SM - LC, EXT-TEMP	-20 to -14	-31 to -14
ONS-SE-100-LX10=	100 Mbps long reach - 1310 nm - MM - LC, EXT-TEMP	-15 to -8	-28 to -8
ONS-SE-155-1470= through ONS-SE-155-1610=	OC-3, STM-1	0 to +5	-34 to -7
ONS-SE-4G-MM=	4G FC/Ficon	-9 to -2.5	-15 -18 to -3
ONS-SE-4G-SM=	4G FC/Ficon	290 microwatts OMA	29 microwatts OMA
ONS-SE-622-1470= through ONS-SE-622-1610=	OC-12, STM-4	0 to +5	-28 to -7
ONS-SE-2G-30.3= through ONS-SE-2G-60.6=	OC-48, STM-16	0 to +4	-28 to -9
ONS-SE-2G-L2=	OC-48, STM-16	-2.0 to 3.0	-22 to -9

SFP	Interface	Transmitter Output Power Min/Max (dBm)	Receiver Input Power Min/Max (dBm)
ONS-SE-2G-S1=	OC-48, STM-16	-10 to -3	-28 to -9
ONS-SE-Z1=	OC-3, OC-12, OC48, STM-1, STM-4, STM-16	-5.0 to 0	-23 to -3 (155.52/622.08 Mbps) -19 to -3 (1250 Mbps) -18 to 0 (2488.32 Mbps)
ONS-SI-155-I1=	OC-3, STM-1	-15 to -8.0	-28 to -8
ONS-SI-155-L1=	OC-3, STM-1	-5.0 to 0	-34 to -10
ONS-SI-155-L2=	OC-3, STM-1	-5.0 to 0	-34 to -10
ONS-SI-2G-I1=	OC-48, STM-16	-5.0 to 0	-18 to -0
ONS-SI-2G-L1=	OC-48, STM-16	-2 to +3	-27 to -9
ONS-SI-2G-L2=	OC-48, STM-16	-2 to +3	-28 to -9
ONS-SI-2G-S1=	OC-48, STM-16	-10 to -3	-18 to -3
ONS-SI-622-I1=	OC-12, OC-3, STM-4, STM-1	-15 to -8.0	-28 to -8
ONS-SI-622-L1=	OC-12, STM-4	-3.0 to 2.0	-28 to -8
ONS-SI-622-L2=	OC-12, STM-4	-3.0 to 2.0	-28 to -8
15454-SFP-LC-SX=/ ONS-SC-GE-SX=	Gigabit Ethernet (GE)	-9.5 to -4	-17 to 0
15454-SFP-LC-LX=/ ONS-SC-GE-LX=	GE	-9.5 to -3	-19 to -3
15454-SFP3-1-IR=	OC-3	-15 to -8	-28 to -8
15454E-SFP-L.1.1=	STM-1	-15 to -8	-34 to -10
15454-SFP12-4-IR=	OC-12, D1 Video	-15 to -8	-28 to -7
15454E-SFP-L.4.1=	STM-4, D1 Video	-15 to -8	-28 to -8
15454-SFP-OC48-IR=	OC-48, DV6000 (C-Cor)	-5 to +0	-18 to +0
15454E-SFP-L.16.1=	STM-16, DV6000 (C-Cor)	-5 to +0	-18 to +0



SFP	Interface	Transmitter Output Power Min/Max (dBm)	Receiver Input Power Min/Max (dBm)
15454-SFP-200=/ 15454E-SFP-200=	Enterprise System Connection (ESCON)	−20.5 to −15	−29 to −14
15454-SFP-GEFC-SX=/ 15454E-SFP-GEFC-S=/ ONS-SE-G2F-SX=	Fibre Channel (1 and 2 Gbps), FICON, GE	−10 to −3.5	−17 to 0 for 1FC, GE −15 for 2FC
15454-SFP-GE+-LX=/ 15454E-SFP-GE+-LX=/ ONS-SE-G2F-LX	Fibre Channel (1 and 2 Gbps), FICON, GE, High-definition television (HDTV)	−9.5 to −3.0	−20 to −3 for 1FC, 2FC, and GE
ONS-SI-155-SR-MM=	OC-3, STM-1	−19 to −14	−14 to −5
ONS-SI-622-SR-MM=	OC-12, STM-4	−19 to −14	−14 to −5
ONS-SC-Z3-1470= through ONS-SC-Z3-1610=	OC48/STM16/GE	0 to +5	−9 (min)
ONS-SE-2G-1470= through ONS-SE-2G-1610=	OC48/STM16/GE	−1 to +4	−28 to −9
ONS-SE-Z1= OC-3/STM1	OC-12/STM-4 OC-48/STM-16 Fibre Channel (1 and 2 Gbps) GE	−5 to 0 −10 to −23 (OC-3)	0 to −23 (OC-12) −18 to 0 (OC-48) 0 to −21 (Fibre Channel) 0 to −22 (GE)
ONS-SI-2G-S1	OC-48/STM-16	−10 to −3	−3 (min)
ONS-SE-155-1470 through ONS-SE-155-1610	OC-3/STM-1	0 to 5	−7 to 0
ONS-SI-GE-ZX	GE	0 to +5	−23 to −3
ONS-SE-GE-ZX	GE	0 to +5	−23 to −3
ONS-SE-ZE-EL	1000 Base-T Ethernet	—	—
ONS-SE-GE-BXD=	1000Base BXD/GE	−9 to −3	−19.5 to −3
ONS-SE-GE-BXU=	1000Base BXU/GE	−9 to −3	−19.5 to −3

SFP	Interface	Transmitter Output Power Min/Max (dBm)	Receiver Input Power Min/Max (dBm)
ONS-SC-EOP1=	Fast Ethernet over DS1/E1	—	—
ONS-SC-EOP3=	Fast Ethernet over DS3/E3	—	—
ONS-SC-E1-T1-PW=	E1/DS1 over Fast Ethernet	—	—
ONS-SC-E3-T3-PW-	E3/DS3 PDH over Fast Ethernet	—	—
ONS-SI-100-FX=	Fast Ethernet	−19.0 to −14	−31.0 to −14
ONS-SI-100-LX10=	Fast Ethernet	−15.0 to −8	−28 to −8
ONS-SC-OSC-ULH=	OC3/STM1/FE OSC	+1 to +5	43 to −7
ONS-SC-OSC-18.0=	OC3/STM1/FE OSC for RAMAN 1518.0 nm signal	+2.5 to +7	43 to −7
ONS-SE-155-1510=	OC3/FE TNC OSC	+1 to +5	43 to −7
ONS-SC-Z3-1510	GE TNC OSC	0 to +5	−29 to −9
ONS-SC-HD3GV-TX=	3G HD Video TX	−3 to 0	−20
ONS-SC-HD3GV-RX=	3G HD Video RX	−3 to 0	−20

## SFP+ Specifications

The following table lists specifications for available SFP+ modules.

**Table 14: SFP+ Specifications**

SFP+	Interface	Transmitter Output Power Min/Max (dBm)	Receiver Input Power Min/Max (dBm)
ONS-SC+-10G-ER=	10GBASE-ER	−4.7 to +4.0	−15.8 to −1.0
ONS-SC+-10G-LR=	10GBASE-LR	−8.2 to +0.5	−14.1 to +0.5
ONS-SC+-10G-SR=	10GBASE-SR	−7.3 to −1.2	−9.9 to −1.0
ONS-SC+-10G-ZR=	10GBASE-ZR	−7.3 to −1.3	−11 to −1

SFP+	Interface	Transmitter Output Power Min/Max (dBm)	Receiver Input Power Min/Max (dBm)
ONS-SC+-10G-303= through ONS-SC+-10G-614=	OC-192, STM-64, 8GFC, 10GE, 10GFC, OTU2, OTU2e	-1.0 to +3.0	<ul style="list-style-type: none"> <li>• -7 to -23 at BER=1E-12 with PRBS31 and 10 GE frame; back-to-back with 23 dB OSNR (0.5 nm resolution bandwidth [RBW])</li> <li>• -7 to -20 at BER=1E-12 with PRBS31 and 10 GE frame; chromatic dispersion (CD) of -500 to +900 ps/nm with 23 dB OSNR (0.5 nm RBW)</li> <li>• -7 to -17 at BER=1E-12 with PRBS31 and 10 GE frame; back-to-back with 23 dB OSNR (0.5 nm RBW)</li> <li>• -7 to -17 at BER=1E-12 with PRBS31 and 10 GE frame; CD of -500 to +900 ps/nm with 20 dB OSNR (0.5 nm RBW)</li> <li>• -7 to -17 at BER=1E-5 (pre-FEC) with PRBS31 and OTU2 frame; back-to-back with 11 dB OSNR (0.5 nm RBW)</li> <li>• -7 to -17 at BER=1E-5 (pre-FEC) with PRBS31 and OTU2 frame; CD of -500 to +1100 ps/nm with 12 dB OSNR (0.5 nm RBW)</li> <li>• -7 to -27 at BER=1E-3 (pre-FEC) with PRBS31 and OTU2 frame; back-to-back with 23 dB OSNR (0.5 nm RBW)</li> <li>• -7 to -24 at BER=1E-3 (pre-FEC) with PRBS31 and OTU2 frame; CD of -500 to +1300 ps/nm with 23 dB OSNR (0.5 nm RBW)</li> <li>• -7 to -17 at BER=1E-3 (pre-FEC) with PRBS31 and OTU2 frame; back-to-back with 8 dB OSNR (0.5 nm RBW)</li> <li>• -7 to -17 at BER=1E-3 (pre-FEC) with PRBS31 and OTU2 frame; CD of -500 to +1100 ps/nm with 9 dB OSNR (0.5 nm RBW)</li> <li>• The maximum allowable Polarization Mode Dispersion (PMD) penalty at 30 ps differential group delay (DGD) is 1dB of optical power in Power Limited condition or 1 dB of OSNR in Noise Limited condition, when the residual CD is 0 ps/nm (BTB condition).</li> <li>• The maximum allowable PMD penalty at 15 ps DGD is 1dB of optical power in Power Limited condition or 1 dB of OSNR in Noise Limited condition, when the residual CD is 1100 ps/nm (System condition).</li> </ul>

## SFP and SFP+ Port Cabling Specifications

[Table 15: Single-Mode Fiber SFP Port Cabling Specifications](#) provides cabling specifications for the SMF SFPs, [Table 16: Multimode Fiber SFP Port Cabling Specifications](#) provides cabling specifications for MMF SFPs, [Table 17: Video SFP Port Cabling Specifications](#) provides cabling specifications of video SFPs, [Table 18: Single-Mode Fiber SFP+ Port Cabling Specifications](#) provides cabling specifications for SMF SFP+ modules, and [Table 19: Multimode Fiber SFP+ Port Cabling Specifications](#) provides cabling specifications for MMF SFP+ modules that you install into interface cards. The ports of the listed SFP and SFP+ modules have LC-type connectors.

### Single-Mode Fiber SFP Port Cabling Specifications

The following table provides cabling specifications for the SMF SFPs.

Important notes for the following table:

- Typical loss on a 1310 nm wavelength SMF is 0.6 dB/km.
- The ONS-SC-2G-28.7, ONS-SC-2G-33.4, ONS-SC-2G-41.3, ONS-SC-2G-49.3, and ONS-SC-2G-57.3 SFPs are supported in Cisco ONS Software Release 8.5 and later releases.
- The ONS-SC-2G-xx.x cable distance varies depending on the DWDM system installation.
- The ONS-SC-2G-37.4, ONS-SC-2G-45.3, and ONS-SC-2G-53.3 SFPs are supported in Cisco ONS Software Release 9.4 and later releases.

**Table 15: Single-Mode Fiber SFP Port Cabling Specifications**

SFP	Transmit Wavelength	Fiber Type	Cable Distance
ONS-SC-2G-28.7=	1528.70 nm	9 micron SMF	N/A
ONS-SC-2G-30.3=	1530.33 nm	9 micron SMF	N/A
ONS-SC-2G-31.1=	1531.12 nm	9 micron SMF	N/A
ONS-SC-2G-31.9=	1531.90 nm	9 micron SMF	N/A
ONS-SC-2G-32.6=	1532.68 nm	9 micron SMF	N/A
ONS-SC-2G-33.4=	1533.47 nm	9 micron SMF	N/A
ONS-SC-2G-34.2=	1534.25 nm	9 micron SMF	N/A
ONS-SC-2G-35.0=	1535.04 nm	9 micron SMF	N/A
ONS-SC-2G-35.8=	1535.82 nm	9 micron SMF	N/A
ONS-SC-2G-36.6=	1536.61 nm	9 micron SMF	N/A

SFP	Transmit Wavelength	Fiber Type	Cable Distance
ONS-SC-2G-37.4=	1537.40 nm	9 micron SMF	N/A
ONS-SC-2G-38.1=	1538.19 nm	9 micron SMF	N/A
ONS-SC-2G-38.9=	1538.98 nm	9 micron SMF	N/A
ONS-SC-2G-39.7=	1539.77 nm	9 micron SMF	N/A
ONS-SC-2G-40.5=	1540.56 nm	9 micron SMF	N/A
ONS-SC-2G-41.3=	1541.35 nm	9 micron SMF	N/A
ONS-SC-2G-42.1=	1542.14 nm	9 micron SMF	N/A
ONS-SC-2G-42.9=	1542.94 nm	9 micron SMF	N/A
ONS-SC-2G-43.7=	1543.73 nm	9 micron SMF	N/A
ONS-SC-2G-44.5=	1544.53 nm	9 micron SMF	N/A
ONS-SC-2G-45.3=	1545.32 nm	9 micron SMF	N/A
ONS-SC-2G-46.1=	1546.12 nm	9 micron SMF	N/A
ONS-SC-2G-46.9=	1546.92 nm	9 micron SMF	N/A
ONS-SC-2G-47.7=	1547.72 nm	9 micron SMF	N/A
ONS-SC-2G-48.5=	1548.51 nm	9 micron SMF	N/A
ONS-SC-2G-49.3=	1549.32 nm	9 micron SMF	N/A
ONS-SC-2G-50.1=	1550.12 nm	9 micron SMF	N/A
ONS-SC-2G-50.9=	1550.92 nm	9 micron SMF	N/A
ONS-SC-2G-51.7=	1551.72 nm	9 micron SMF	N/A
ONS-SC-2G-52.5=	1552.52 nm	9 micron SMF	N/A
ONS-SC-2G-53.3=	1553.33 nm	9 micron SMF	N/A
ONS-SC-2G-54.1=	1554.13 nm	9 micron SMF	N/A
ONS-SC-2G-54.9=	1554.94 nm	9 micron SMF	N/A
ONS-SC-2G-55.7=	1555.75 nm	9 micron SMF	N/A

SFP	Transmit Wavelength	Fiber Type	Cable Distance
ONS-SC-2G-56.5=	1556.55 nm	9 micron SMF	N/A
ONS-SC-2G-57.3=	1557.36 nm	9 micron SMF	N/A
ONS-SC-2G-58.1=	1558.17 nm	9 micron SMF	N/A
ONS-SC-2G-58.9=	1558.98 nm	9 micron SMF	N/A
ONS-SC-2G-59.7=	1559.79 nm	9 micron SMF	N/A
ONS-SC-2G-60.6=	1560.61 nm	9 micron SMF	N/A
ONS-SE-155-1470=	1470 nm	9 micron SMF	120 km (74.56 miles)
ONS-SE-155-1490=	1490 nm	9 micron SMF	120 km (74.56 miles)
ONS-SE-155-1510=	1510 nm	9 micron SMF	120 km (74.56 miles)
ONS-SE-155-1530=	1530 nm	9 micron SMF	120 km (74.56 miles)
ONS-SE-155-1550=	1550 nm	9 micron SMF	120 km (74.56 miles)
ONS-SE-155-1570=	1570 nm	9 micron SMF	120 km (74.56 miles)
ONS-SE-155-1590=	1590 nm	9 micron SMF	120 km (74.56 miles)
ONS-SE-155-1610=	1610 nm	9 micron SMF	120 km (74.56 miles)
ONS-SE-622-1470=	1470 nm	9 micron SMF	100 km (62.14 miles)
ONS-SE-622-1490=	1490 nm	9 micron SMF	100 km (62.14 miles)
ONS-SE-622-1510=	1510 nm	9 micron SMF	100 km (62.14 miles)
ONS-SE-622-1530=	1530 nm	9 micron SMF	100 km (62.14 miles)
ONS-SE-622-1550=	1550 nm	9 micron SMF	100 km (62.14 miles)
ONS-SE-622-1570=	1570 nm	9 micron SMF	100 km (62.14 miles)
ONS-SE-622-1590=	1590 nm	9 micron SMF	100 km (62.14 miles)
ONS-SE-622-1610=	1610 nm	9 micron SMF	100 km (62.14 miles)
ONS-SE-2G-L2=	1550 nm	9 micron SMF	80 km (49.71 miles)
ONS-SE-2G-S1= Short Reach	1310 nm	9 micron SMF	2 km (1.2 miles)

SFP	Transmit Wavelength	Fiber Type	Cable Distance
ONS-SE-4G-SM=	1270 – 1355 nm	9 micron SMF	10 km (6.2 miles)
ONS-SE-Z1=	1310 nm	9 micron SMF	15 km (9.3 miles)
ONS-SI-155-I1= Intermediate Reach	1310 nm	9 micron SMF	21 km (13.05 miles)
ONS-SI-155-L1= Long Reach	1310 nm	9 micron SMF	50 km (31.07 miles)
ONS-SI-155-L2= Long Reach	1550 nm	9 micron SMF	100 km (62.14 miles)
ONS-SI-2G-I1=	1310 nm	9 micron SMF	15 km (9.3 miles)
ONS-SI-2G-L1=	1310 nm	9 micron SMF	40 km (25.80 miles)
ONS-SI-2G-L2=	1550 nm	9 micron SMF	80 km (49.71 miles)
ONS-SI-2G-S1=	1310 nm	9 micron SMF	2 km (1.2 miles)
ONS-SI-622-I1= Intermediate Reach	1310 nm	9 micron SMF	21 km (13.05 miles)
ONS-SI-622-L1= Long Reach	1310 nm	9 micron SMF	42 km (26.10 miles)
ONS-SI-622-L2= Long Reach	1550 nm	9 micron SMF	85 km (52.82 miles)
15454-SFP-LC-LX=/ 15454E-SFP-LC-LX=/ ONS-SC-GE-LX Long Reach	1310 nm	9 micron SMF	10 km (6.2 miles)
15454-SFP3-1-IR= Intermediate Reach	1310 nm	9 micron SMF	15 km (9.3 miles)
15454E-SFP-L.1.1= Short Haul	1310 nm	9 micron SMF	15 km (9.3 miles)
15454-SFP12-4-IR= Intermediate Reach	1310 nm	9 micron SMF	15 km (9.3 miles)
15600-SFP-12-4-LR2=	1530 nm	9 micron SMF	80 km (49.71 miles)

SFP	Transmit Wavelength	Fiber Type	Cable Distance
15454E-SFP-L.4.1= Short Haul	1310 nm	9 micron SMF	15 km (9.3 miles)
15454-SFP-OC48-IR= Intermediate Reach	1310 nm	9 micron SMF	15 km (9.3 miles)
15454E-SFP-L.16.1= Short Haul	1310 nm	9 micron SMF	15 km (9.3 miles)
15454-SFP-GE+-LX= 15454E-SFP-GE+-LX= Long Reach	1310 nm	9 micron SMF	10 km (6.2 miles) for FC 1G, FC 2G, and GE 5 km (3.1 miles) for HDTV
ONS-SC-Z3-1470= Long Reach	1470 nm	9 micron SMF	80 km (49.71 miles)
ONS-SC-Z3-1490= Long Reach	1490 nm	9 micron SMF	80 km (49.71 miles)
ONS-SC-Z3-1510= Long Reach	1510 nm	9 micron SMF	80 km (49.71 miles)
ONS-SC-Z3-1530= Long Reach	1530 nm	9 micron SMF	80 km (49.71 miles)
ONS-SC-Z3-1550= Long Reach	1550 nm	9 micron SMF	80 km (49.71 miles)
ONS-SC-Z3-1570= Long Reach	1570 nm	9 micron SMF	80 km (49.71 miles)
ONS-SC-Z3-1590= Long Reach	1590 nm	9 micron SMF	80 km (49.71 miles)
ONS-SC-Z3-1610= Long Reach	1610 nm	9 micron SMF	80 km (49.71 miles)
ONS-SE-Z1= Intermediate Reach	1310 nm	9 micron SMF	30 km (18.6 miles) for OC-3/STM1, OC-12/STM-4, OC-48/STM-16, and Fibre Channel (1 and 2 Gbps) 20 km (12.4 miles) for GE



SFP	Transmit Wavelength	Fiber Type	Cable Distance
ONS-SI-2G-S1= Short Reach	1310 nm	9 micron SMF	2 km (1.2 miles)
ONS-SE-155-1470= Long Reach	1470 nm	9 micron SMF	80 km (49.71 miles)
ONS-SE-155-1490= Long Reach	1490 nm	9 micron SMF	80 km (49.71 miles)
ONS-SE-155-1510= Long Reach	1510 nm	9 micron SMF	80 km (49.71 miles)
ONS-SE-155-1530= Long Reach	1530 nm	9 micron SMF	80 km (49.71 miles)
ONS-SE-155-1550= Long Reach	1550 nm	9 micron SMF	80 km (49.71 miles)
ONS-SE-155-1570= Long Reach	1570 nm	9 micron SMF	80 km (49.71 miles)
ONS-SE-155-1590= Long Reach	1590 nm	9 micron SMF	80 km (49.71 miles)
ONS-SE-155-1610= Long Reach	1610 nm	9 micron SMF	80 km (49.71 miles)
ONS-SE-622-1470= Long Reach	1470 nm	9 micron SMF	100 km (62.14 miles)
ONS-SE-622-1490= Long Reach	1490 nm	9 micron SMF	100 km (62.14 miles)
ONS-SE-622-1510= Long Reach	1510 nm	9 micron SMF	100 km (62.14 miles)
ONS-SE-622-1530= Long Reach	1530 nm	9 micron SMF	100 km (62.14 miles)
ONS-SE-622-1550= Long Reach	1550 nm	9 micron SMF	100 km (62.14 miles)
ONS-SE-622-1570= Long Reach	1570 nm	9 micron SMF	100 km (62.14 miles)
ONS-SE-622-1590= Long Reach	1590 nm	9 micron SMF	100 km (62.14 miles)

SFP	Transmit Wavelength	Fiber Type	Cable Distance
ONS-SE-622-1610= Long Reach	1610 nm	9 micron SMF	100 km (62.14 miles)
ONS-SI-GE-ZX=	1550 nm	9 micron SMF	80 km (49.71 miles)
ONS-SE-GE-ZX=	1550 nm	9 micron SMF	80 km (49.71 miles)
ONS-SE-GE-BXD=	1550 nm	9 micron SMF	80 km (49.71 miles)
ONS-SE-GE-BXU=	1550 nm	9 micron SMF	80 km (49.71 miles)
ONS-SC-EOP1=	—	9 micron SMF	2.5 km (1.56 miles)
ONS-SC-EOP3=	—	9 micron SMF	2.5 km (1.56 miles)
ONS-SC-E1-T1-PW=	—	9 micron SMF	1.83 km (1.136 miles)
ONS-SC-E3-T3-PW=	—	9 micron SMF	1.83 km (1.136 miles)
ONS-SC-E1-T1-CES=	—	9 micron SMF	1.83 km (1.136 miles)
ONS-SC-E3-T3-CES=	—	9 micron SMF	1.83 km (1.136 miles)
ONS-SI-100-LX10=	1310 nm	9 micron SMF	2 km (1.24 miles)
ONS-SC-OSC-ULH=	1500 – 1520 nm	9 micron SMF	160 km (99.41 miles)
ONS-SC-OSC-18.0=	1518 nm	—	—

## Multimode Fiber SFP Port Cabling Specifications

The following table provides cabling specifications for the MMF SFPs.

**Table 16: Multimode Fiber SFP Port Cabling Specifications**

SFP	Transmit Wavelength	Fiber Type	Cable Distance
ONS-SE-4G-MM=	830 – 860 nm	62.5 micron MMF	300 m (984 ft)
		50.0 micron MMF	500 m (1640 ft)
ONS-SE-100-FX=	1270 – 1380 nm	MMF	2 km (1.24 miles)
ONS-SE-100-LX10=	1260 – 1360 nm	MMF	15 km (9.32 miles)

SFP	Transmit Wavelength	Fiber Type	Cable Distance
15454-SFP-LC-SX= Short Reach	850 nm	62.5 micron MMF	220 m (722 ft) 275 m (902 ft)
		50.0 micron MMF	500 m (1640 ft) 550 m (1804 ft)
15454-SFP-LC-LX= Long Reach	1310 nm	62.5 micron MMF	550 m (1804 ft)
		50.0 micron MMF	550 m (1804 ft)
15454-SFP-200= Long Reach	1310 nm	62.5 micron MMF	2 km (1.2 miles)
ONS-SE-200-MM=	1310 nm	62.5 micron MMF	2 km (1.2 miles)
15454-SFP-GEFC-SX= Short Reach	850 nm	62.5 micron MMF	300 m (984 ft) for FC 1 Gbps and GE 150 m (492 ft) for FC 2 Gbps
		50.0 micron MMF	550 m (1804 ft) for FC 1 Gbps and GE 300 m (984 ft) for FC 2 Gbps
ONS-SI-155-SR-MM= Intermediate Reach	1310 nm	62.5/125 micron MMF	2 km (1.2 miles)
ONS-SI-622-SR-MM= Intermediate Reach	1310 nm	62.5/125 micron MMF	2 km (1.2 miles)
ONS-SI-100-FX=	1310 nm	MMF	2 km (1.24 miles)

## Video SFP Port Cabling Specifications

The following table provides cabling specifications for video SFPs.

**Table 17: Video SFP Port Cabling Specifications**

SFP	Operating Wavelength Range	Fiber Type	Cable Distance
ONS-SC-HD3GV-TX=	1270 – 1350 nm	—	—

SFP	Operating Wavelength Range	Fiber Type	Cable Distance
ONS-SC-HD3GV-RX=	1270 – 1350 nm	—	—

## Single-Mode Fiber SFP+ Port Cabling Specifications

The following table provides cabling specifications for the SMF SFP+ modules.

**Table 18: Single-Mode Fiber SFP+ Port Cabling Specifications**

SFP+	Transmit Wavelength	Fiber Type	Cable Distance
ONS-SC+-10G-ER=	1550 nm	9 micron SMF	40 km (24.85 miles)
ONS-SC+-10G-LR=	1310 nm	9 micron SMF	10 km (6.214 miles)
ONS-SC+-10G-30.3= through ONS-SC+-10G-61.4=	1530.3 - 1561.4 nm	9 micron SMF	40 km (24.85 miles)

## Multimode Fiber SFP+ Port Cabling Specifications

The following table provides cabling specifications for the MMF SFP+ modules.

**Table 19: Multimode Fiber SFP+ Port Cabling Specifications**

SFP+	Transmit Wavelength	Fiber Type	Cable Distance
ONS-SC+-10G-SR=	840-860 nm	62.5 micron FDDI-Grade	26 m (85.3 ft)
		62.5 micron OM1	33 m (108.27 ft)
		50.0 micron	66 m (216.54 ft)
		50.0 micron OM2	82 m (269 ft)
		50.0 micron OM3	300 m (984 ft)
		50.0 micron OM4	400 m (1312.36 ft)

## XFP Description and Specifications

The 10 Gbps 1310 nm XFP transceiver is an integrated fiber optic transceiver that provides high-speed serial link at the following signaling rates—9.95 Gbps, 10.31 Gbps, 10.51 Gbps, and 10.66/10.71/11.10 Gbps. These rates apply to 10GBASE-LR (Fibre Channel and Ethernet) as well as OC-192/STM-64 SONET/SDH.

The XFP integrates the receiver and transmit path. The transmit side recovers and retimes the 10 Gbps serial data and passes it to a laser driver. The laser driver biases and modulates a 1310 nm DFB (distributed feedback) laser, enabling data transmission over SMF through an LC connector. The receive side recovers and retimes the 10 Gbps optical data stream from a positive-intrinsic-negative (PIN) photo detector, transimpedance amplifier and passes it to an output driver.

The XFP module uses the bail clasp latching mechanism as shown unlatched in the following figures. See the label on the XFP for technology type and model.

XFP module dimensions are:

- Height 0.33 inches (8.5 mm)
- Width 0.72 inches (18.3 mm)
- Depth 3.1 inches (78 mm)


XFP temperature ranges are:

- COM—Commercial operating temperature range between 23 degrees Fahrenheit to 158 degrees Fahrenheit (-5 degrees Celsius to 70 degrees Celsius)
- EXT—Extended operating temperature range between 23 degrees Fahrenheit to 185 degrees Fahrenheit (-5 degrees Celsius to 85 degrees Celsius)
- IND—Industrial operating temperature range between -40 degrees Fahrenheit to 185 degrees Fahrenheit (-40 degrees Celsius to 85 degrees Celsius)


**Caution**

Do not add labels or markings to the XFP modules.

**Figure 8: Bail Clasp XFP (Unlatched)**

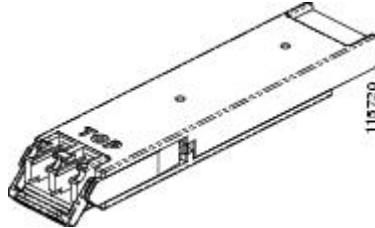

**Figure 9: Bail Clasp XFP (Latched)**

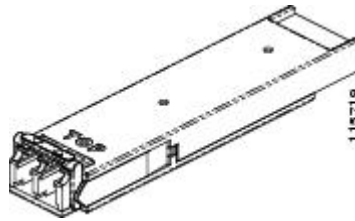

## XFP Specifications

The following table lists specifications for available XFPs.

Important notes for the following table:

- The ONS-XC-10G-L2 XFP installed on a transponder card, must be installed in high-speed slots 5, 6, 12, or 13 for power dissipation when FTA-3 or FTA-48V is used. There is no restriction on the slots in which the ONS-XC-10G-L2-FXP is installed when CC-FTA is used.
- The IB\_5G payload is supported by ONS-XC-10G-S1 XFP P/N version 03 only.

**Table 20: XFP Specifications**

XFP	Interface	Transmitter Output Power Min/Max (dBm)	Receiver Input Power Min/Max (dBm)
ONS-XC-8G-MM=	OC192/STM64/8GFC	-8.2 to -1.5	0.151 mW (stressed received in OMA)
ONS-XC-8G-SM=	OC192/STM64/8GFC	-8.4 to +0.5	-13.8 (-11.8 stressed) to +0.5 (targeting up to 10 km distance)
ONS-XC-10G-C=	OC-192/STM-64/10GE/10GFC/OTU2/IB_5G	0 to +3	-24 to -7

<b>XFP</b>	<b>Interface</b>	<b>Transmitter Output Power Min/Max (dBm)</b>	<b>Receiver Input Power Min/Max (dBm)</b>
ONS-XC-10G-I2=	OC-192/STM-64/10GE/10GFC/OTU2	-1 to +2	-14 to +2
ONS-XC-10G-L2=	OC-192/STM-64/10GE/10GFC/OTU2	0 to +4	-24 to -7
ONS-XC-10G-S1=	OC-192/STM64/10GE/10GFC/IB_5G	-6 to -1 -8.2 to +0.5	-11 to -1 -14.4 to +0.5
ONS-XC-10G-SR-MM=	OC-192/STM-64/10GE/10GFC/OTU2	-7.3 to -1	-9.9 to -1
ONS-XC-10G-30.3=	OC-192/STM-64/10GE/10GFC/OTU2/IB_5G	-1 to +3	-23 to -7
ONS-XC-10G-31.1=	OC-192/STM-64/10GE/10GFC/OTU2/IB_5G	-1 to +3	-23 to -7
ONS-XC-10G-31.9=	OC-192/STM-64/10GE/10GFC/OTU2/IB_5G	-1 to +3	-23 to -7
ONS-XC-10G-32.6=	OC-192/STM-64/10GE/10GFC/OTU2/IB_5G	-1 to +3	-23 to -7
ONS-XC-10G-33.4=	OC-192/STM-64/10GE/10GFC/OTU2/IB_5G	-1 to +3	-23 to -7
ONS-XC-10G-34.2=	OC-192/STM-64/10GE/10GFC/OTU2/IB_5G	-1 to +3	-23 to -7
ONS-XC-10G-35.0=	OC-192/STM-64/10GE/10GFC/OTU2/IB_5G	-1 to +3	-23 to -7
ONS-XC-10G-35.8=	OC-192/STM-64/10GE/10GFC/OTU2/IB_5G	-1 to +3	-23 to -7
ONS-XC-10G-36.6=	OC-192/STM-64/10GE/10GFC/OTU2/IB_5G	-1 to +3	-23 to -7
ONS-XC-10G-37.4=	OC-192/STM-64/10GE/10GFC/OTU2/IB_5G	-1 to +3	-23 to -7
ONS-XC-10G-38.1=	OC-192/STM-64/10GE/10GFC/OTU2/IB_5G	-1 to +3	-23 to -7
ONS-XC-10G-38.9=	OC-192/STM-64/10GE/10GFC/OTU2/IB_5G	-1 to +3	-23 to -7
ONS-XC-10G-39.7=	OC-192/STM-64/10GE/10GFC/OTU2/IB_5G	-1 to +3	-23 to -7
ONS-XC-10G-40.5=	OC-192/STM-64/10GE/10GFC/OTU2/IB_5G	-1 to +3	-23 to -7
ONS-XC-10G-41.3=	OC-192/STM-64/10GE/10GFC/OTU2/IB_5G	-1 to +3	-23 to -7
ONS-XC-10G-42.1=	OC-192/STM-64/10GE/10GFC/OTU2/IB_5G	-1 to +3	-23 to -7
ONS-XC-10G-42.9=	OC-192/STM-64/10GE/10GFC/OTU2/IB_5G	-1 to +3	-23 to -7
ONS-XC-10G-43.7=	OC-192/STM-64/10GE/10GFC/OTU2/IB_5G	-1 to +3	-23 to -7
ONS-XC-10G-44.5=	OC-192/STM-64/10GE/10GFC/OTU2/IB_5G	-1 to +3	-23 to -7

XFP	Interface	Transmitter Output Power Min/Max (dBm)	Receiver Input Power Min/Max (dBm)
ONS-XC-10G-45.3=	OC-192/STM-64/10GE/10GFC/OTU2/IB_5G	-1 to +3	-23 to -7
ONS-XC-10G-46.1=	OC-192/STM-64/10GE/10GFC/OTU2/IB_5G	-1 to +3	-23 to -7
ONS-XC-10G-46.9=	OC-192/STM-64/10GE/10GFC/OTU2/IB_5G	-1 to +3	-23 to -7
ONS-XC-10G-47.7=	OC-192/STM-64/10GE/10GFC/OTU2/IB_5G	-1 to +3	-23 to -7
ONS-XC-10G-48.5=	OC-192/STM-64/10GE/10GFC/OTU2/IB_5G	-1 to +3	-23 to -7
ONS-XC-10G-49.3=	OC-192/STM-64/10GE/10GFC/OTU2/IB_5G	-1 to +3	-23 to -7
ONS-XC-10G-50.1=	OC-192/STM-64/10GE/10GFC/OTU2/IB_5G	-1 to +3	-23 to -7
ONS-XC-10G-50.9=	OC-192/STM-64/10GE/10GFC/OTU2/IB_5G	-1 to +3	-23 to -7
ONS-XC-10G-51.7=	OC-192/STM-64/10GE/10GFC/OTU2/IB_5G	-1 to +3	-23 to -7
ONS-XC-10G-52.5=	OC-192/STM-64/10GE/10GFC/OTU2/IB_5G	-1 to +3	-23 to -7
ONS-XC-10G-53.3=	OC-192/STM-64/10GE/10GFC/OTU2/IB_5G	-1 to +3	-23 to -7
ONS-XC-10G-54.1=	OC-192/STM-64/10GE/10GFC/OTU2/IB_5G	-1 to +3	-23 to -7
ONS-XC-10G-54.9=	OC-192/STM-64/10GE/10GFC/OTU2/IB_5G	-1 to +3	-23 to -7
ONS-XC-10G-55.7=	OC-192/STM-64/10GE/10GFC/OTU2/IB_5G	-1 to +3	-23 to -7
ONS-XC-10G-56.5=	OC-192/STM-64/10GE/10GFC/OTU2/IB_5G	-1 to +3	-23 to -7
ONS-XC-10G-57.3=	OC-192/STM-64/10GE/10GFC/OTU2/IB_5G	-1 to +3	-23 to -7
ONS-XC-10G-58.1=	OC-192/STM-64/10GE/10GFC/OTU2/IB_5G	-1 to +3	-23 to -7
ONS-XC-10G-58.9=	OC-192/STM-64/10GE/10GFC/OTU2/IB_5G	-1 to +3	-23 to -7
ONS-XC-10G-59.7=	OC-192/STM-64/10GE/10GFC/OTU2/IB_5G	-1 to +3	-23 to -7
ONS-XC-10G-60.6=	OC-192/STM-64/10GE/10GFC/OTU2/IB_5G	-1 to +3	-23 to -7
ONS-XC-10G-61.4=	OC-192/STM-64/10GE/10GFC/OTU2/IB_5G	-1 to +3	-23 to -7
ONS-XC-10G-1470=	OC-192/STM-64/10GE/10GFC/OTU2	+3 to +7	-14 to -0
ONS-XC-10G-1490=	OC-192/STM-64/10GE/10GFC/OTU2	+3 to +7	-14 to -0
ONS-XC-10G-1510=	OC-192/STM-64/10GE/10GFC/OTU2	+3 to +7	-14 to -0



<b>XFP</b>	<b>Interface</b>	<b>Transmitter Output Power Min/Max (dBm)</b>	<b>Receiver Input Power Min/Max (dBm)</b>
ONS-XC-10G-1530=	OC-192/STM-64/10GE/10GFC/OTU2	+3 to +7	-14 to -0
ONS-XC-10G-1550=	OC-192/STM-64/10GE/10GFC/OTU2	+3 to +7	-14 to -0
ONS-XC-10G-1570=	OC-192/STM-64/10GE/10GFC/OTU2	+3 to +7	-14 to -0
ONS-XC-10G-1590=	OC-192/STM-64/10GE/10GFC/OTU2	+3 to +7	-14 to -0
ONS-XC-10G-1610=	OC-192/STM-64/10GE/10GFC/OTU2	+3 to +7	-14 to -0
ONS-XC-10G-EP30.3=	OC-192/STM-64/10GE/10GFC/OTU2	-1 to +3	-27 to -8
ONS-XC-10G-EP31.1=	OC-192/STM-64/10GE/10GFC/OTU2	-1 to +3	-27 to -8
ONS-XC-10G-EP31.9=	OC-192/STM-64/10GE/10GFC/OTU2	-1 to +3	-27 to -8
ONS-XC-10G-EP32.6=	OC-192/STM-64/10GE/10GFC/OTU2	-1 to +3	-27 to -8
ONS-XC-10G-EP33.4=	OC-192/STM-64/10GE/10GFC/OTU2	-1 to +3	-27 to -8
ONS-XC-10G-EP34.2=	OC-192/STM-64/10GE/10GFC/OTU2	-1 to +3	-27 to -8
ONS-XC-10G-EP35.0=	OC-192/STM-64/10GE/10GFC/OTU2	-1 to +3	-27 to -8
ONS-XC-10G-EP35.8=	OC-192/STM-64/10GE/10GFC/OTU2	-1 to +3	-27 to -8
ONS-XC-10G-EP36.6=	OC-192/STM-64/10GE/10GFC/OTU2	-1 to +3	-27 to -8
ONS-XC-10G-EP37.4=	OC-192/STM-64/10GE/10GFC/OTU2	-1 to +3	-27 to -8
ONS-XC-10G-EP38.1=	OC-192/STM-64/10GE/10GFC/OTU2	-1 to +3	-27 to -8
ONS-XC-10G-EP38.9=	OC-192/STM-64/10GE/10GFC/OTU2	-1 to +3	-27 to -8
ONS-XC-10G-EP39.7=	OC-192/STM-64/10GE/10GFC/OTU2	-1 to +3	-27 to -8
ONS-XC-10G-EP40.5=	OC-192/STM-64/10GE/10GFC/OTU2	-1 to +3	-27 to -8
ONS-XC-10G-EP41.3=	OC-192/STM-64/10GE/10GFC/OTU2	-1 to +3	-27 to -8
ONS-XC-10G-EP42.1=	OC-192/STM-64/10GE/10GFC/OTU2	-1 to +3	-27 to -8
ONS-XC-10G-EP42.9=	OC-192/STM-64/10GE/10GFC/OTU2	-1 to +3	-27 to -8
ONS-XC-10G-EP43.7=	OC-192/STM-64/10GE/10GFC/OTU2	-1 to +3	-27 to -8
ONS-XC-10G-EP44.5=	OC-192/STM-64/10GE/10GFC/OTU2	-1 to +3	-27 to -8

<b>XFP</b>	<b>Interface</b>	<b>Transmitter Output Power Min/Max (dBm)</b>	<b>Receiver Input Power Min/Max (dBm)</b>
ONS-XC-10G-EP45.3=	OC-192/STM-64/10GE/10GFC/OTU2	-1 to +3	-27 to -8
ONS-XC-10G-EP46.1=	OC-192/STM-64/10GE/10GFC/OTU2	-1 to +3	-27 to -8
ONS-XC-10G-EP46.9=	OC-192/STM-64/10GE/10GFC/OTU2	-1 to +3	-27 to -8
ONS-XC-10G-EP47.7=	OC-192/STM-64/10GE/10GFC/OTU2	-1 to +3	-27 to -8
ONS-XC-10G-EP48.5=	OC-192/STM-64/10GE/10GFC/OTU2	-1 to +3	-27 to -8
ONS-XC-10G-EP49.3=	OC-192/STM-64/10GE/10GFC/OTU2	-1 to +3	-27 to -8
ONS-XC-10G-EP50.1=	OC-192/STM-64/10GE/10GFC/OTU2	-1 to +3	-27 to -8
ONS-XC-10G-EP50.9=	OC-192/STM-64/10GE/10GFC/OTU2	-1 to +3	-27 to -8
ONS-XC-10G-EP51.7=	OC-192/STM-64/10GE/10GFC/OTU2	-1 to +3	-27 to -8
ONS-XC-10G-EP52.5=	OC-192/STM-64/10GE/10GFC/OTU2	-1 to +3	-27 to -8
ONS-XC-10G-EP53.3=	OC-192/STM-64/10GE/10GFC/OTU2	-1 to +3	-27 to -8
ONS-XC-10G-EP54.1=	OC-192/STM-64/10GE/10GFC/OTU2	-1 to +3	-27 to -8
ONS-XC-10G-EP54.9=	OC-192/STM-64/10GE/10GFC/OTU2	-1 to +3	-27 to -8
ONS-XC-10G-EP55.7=	OC-192/STM-64/10GE/10GFC/OTU2	-1 to +3	-27 to -8
ONS-XC-10G-EP56.5=	OC-192/STM-64/10GE/10GFC/OTU2	-1 to +3	-27 to -8
ONS-XC-10G-EP57.3=	OC-192/STM-64/10GE/10GFC/OTU2	-1 to +3	-27 to -8
ONS-XC-10G-EP58.1=	OC-192/STM-64/10GE/10GFC/OTU2	-1 to +3	-27 to -8
ONS-XC-10G-EP58.9=	OC-192/STM-64/10GE/10GFC/OTU2	-1 to +3	-27 to -8
ONS-XC-10G-EP59.7=	OC-192/STM-64/10GE/10GFC/OTU2	-1 to +3	-27 to -8
ONS-XC-10G-EP60.6=	OC-192/STM-64/10GE/10GFC/OTU2	-1 to +3	-27 to -8
ONS-XC-10G-EP61.4=	OC-192/STM-64/10GE/10GFC/OTU2	-1 to +3	-27 to -8

## Single-Mode Fiber XFP Port Cabling Specifications

The following table lists specifications for single-mode fiber XFP port cabling.

Important note for the following table:

- In CTC card view, ONS-XC-10G-1530 XFP shows the supported wavelength as 1530.33 nm. When you try to set the wavelength as 1530 nm, the PROV-MISMATCH alarm is raised.

**Table 21: Single-Mode Fiber XFP Port Cabling Specifications**

XFP	Wavelength	Fiber Type	Cable Distance
ONS-XC-8G-SM=	1550 nm	SMF	—
ONS-XC-10G-C=	1529.55 nm through 1561.83 nm, with ITU spacing	SMF	80 km (49.71 miles) for OC-192/STM64/10GE
ONS-XC-10G-I2=	Receiver: 1260 nm to 1565 nm Transmitter: 1530 nm to 1565 nm	SMF	40 km (25.80 miles) for OC-192/STM64
ONS-XC-10G-L2=	Transmitter: 1530 nm to 1565 nm Receiver: 1260 nm to 1565 nm	SMF	80 km (49.71 miles) for OC-192/STM64
ONS-XC-10G-S1=	1310 nm	SMF	10 km (6.2 miles) for 10GE/10GFC 2 km (1.2 miles) for OC-192/STM64
ONS-XC-10G-29.9=	1529.95 nm	SMF	80 km (49.71 miles) for OC-192/STM64
ONS-XC-10G-30.3=	1530.33 nm	SMF	80 km (49.71 miles) for OC-192/STM64
ONS-XC-10G-31.1=	1531.12 nm	SMF	80 km (49.71 miles) for OC-192/STM64
ONS-XC-10G-31.9=	1531.90 nm	SMF	80 km (49.71 miles) for OC-192/STM64
ONS-XC-10G-32.6=	1532.68 nm	SMF	80 km (49.71 miles) for OC-192/STM64

<b>XFP</b>	<b>Wavelength</b>	<b>Fiber Type</b>	<b>Cable Distance</b>
ONS-XC-10G-33.4=	1533.47 nm	SMF	80 km (49.71 miles) for OC-192/STM64
ONS-XC-10G-34.2=	1534.25 nm	SMF	80 km (49.71 miles) for OC-192/STM64
ONS-XC-10G-35.0=	1535.04 nm	SMF	80 km (49.71 miles) for OC-192/STM64
ONS-XC-10G-35.8=	1535.82 nm	SMF	80 km (49.71 miles) for OC-192/STM64
ONS-XC-10G-36.6=	1536.61 nm	SMF	80 km (49.71 miles) for OC-192/STM64
ONS-XC-10G-37.4=	1537.40 nm	SMF	80 km (49.71 miles) for OC-192/STM64
ONS-XC-10G-38.1=	1538.19 nm	SMF	80 km (49.71 miles) for OC-192/STM64
ONS-XC-10G-38.9=	1538.98 nm	SMF	80 km (49.71 miles) for OC-192/STM64
ONS-XC-10G-39.7=	1539.77 nm	SMF	80 km (49.71 miles) for OC-192/STM64
ONS-XC-10G-40.5=	1540.56 nm	SMF	80 km (49.71 miles) for OC-192/STM64
ONS-XC-10G-41.3=	1541.35 nm	SMF	80 km (49.71 miles) for OC-192/STM64
ONS-XC-10G-42.1=	1542.14 nm	SMF	80 km (49.71 miles) for OC-192/STM64
ONS-XC-10G-42.9=	1542.94 nm	SMF	80 km (49.71 miles) for OC-192/STM64
ONS-XC-10G-43.7=	1543.73 nm	SMF	80 km (49.71 miles) for OC-192/STM64
ONS-XC-10G-44.5=	1544.53 nm	SMF	80 km (49.71 miles) for OC-192/STM64
ONS-XC-10G-45.3=	1545.32 nm	SMF	80 km (49.71 miles) for OC-192/STM64

<b>XFP</b>	<b>Wavelength</b>	<b>Fiber Type</b>	<b>Cable Distance</b>
ONS-XC-10G-46.1=	1546.12 nm	SMF	80 km (49.71 miles) for OC-192/STM64
ONS-XC-10G-46.9=	1546.92 nm	SMF	80 km (49.71 miles) for OC-192/STM64
ONS-XC-10G-47.7=	1547.72 nm	SMF	80 km (49.71 miles) for OC-192/STM64
ONS-XC-10G-48.5=	1548.51 nm	SMF	80 km (49.71 miles) for OC-192/STM64
ONS-XC-10G-49.3=	1549.32 nm	SMF	80 km (49.71 miles) for OC-192/STM64
ONS-XC-10G-50.1=	1550.12 nm	SMF	80 km (49.71 miles) for OC-192/STM64
ONS-XC-10G-50.9=	1550.92 nm	SMF	80 km (49.71 miles) for OC-192/STM64
ONS-XC-10G-51.7=	1551.72 nm	SMF	80 km (49.71 miles) for OC-192/STM64
ONS-XC-10G-52.5=	1552.52 nm	SMF	80 km (49.71 miles) for OC-192/STM64
ONS-XC-10G-53.3=	1553.33 nm	SMF	80 km (49.71 miles) for OC-192/STM64
ONS-XC-10G-54.1=	1554.13 nm	SMF	80 km (49.71 miles) for OC-192/STM64
ONS-XC-10G-54.9=	1554.94 nm	SMF	80 km (49.71 miles) for OC-192/STM64
ONS-XC-10G-55.7=	1555.75 nm	SMF	80 km (49.71 miles) for OC-192/STM64
ONS-XC-10G-56.5=	1556.55 nm	SMF	80 km (49.71 miles) for OC-192/STM64
ONS-XC-10G-57.3=	1557.36 nm	SMF	80 km (49.71 miles) for OC-192/STM64
ONS-XC-10G-58.1=	1558.17 nm	SMF	80 km (49.71 miles) for OC-192/STM64

<b>XFP</b>	<b>Wavelength</b>	<b>Fiber Type</b>	<b>Cable Distance</b>
ONS-XC-10G-58.9=	1558.98 nm	SMF	80 km (49.71 miles) for OC-192/STM64
ONS-XC-10G-59.7=	1559.79 nm	SMF	80 km (49.71 miles) for OC-192/STM64
ONS-XC-10G-60.6=	1560.61 nm	SMF	80 km (49.71 miles) for OC-192/STM64
ONS-XC-10G-61.4=	1561.43 nm	SMF	80 km (49.71 miles) for OC-192/STM64
ONS-XC-10G-1470=	1470 nm	SMF	40 km (25.80 miles) for OTU2 and 10GE 10 km (6.2 miles) for OC192/STM64
ONS-XC-10G-1490=	1490 nm	SMF	40 km (25.80 miles) for OTU2 and 10GE 10 km (6.2 miles) for OC192/STM64
ONS-XC-10G-1510=	1510 nm	SMF	40 km (25.80 miles) for OTU2 and 10GE 10 km (6.2 miles) for OC192/STM64
ONS-XC-10G-1530=	1530 nm	SMF	40 km (25.80 miles) for OTU2 and 10GE 10 km (6.2 miles) for OC192/STM64
ONS-XC-10G-1550=	1550 nm	SMF	40 km (25.80 miles) for OTU2 and 10GE 10 km (6.2 miles) for OC192/STM64
ONS-XC-10G-1570=	1570 nm	SMF	40 km (25.80 miles) for OTU2 and 10GE 10 km (6.2 miles) for OC192/STM64
ONS-XC-10G-1590=	1590 nm	SMF	40 km (25.80 miles) for OTU2 and 10GE 10 km (6.2 miles) for OC192/STM64

XFP	Wavelength	Fiber Type	Cable Distance
ONS-XC-10G-1610=	1610 nm	SMF	40 km (25.80 miles) for OTU2 and 10GE 10 km (6.2 miles) for OC192/STM64
ONS-XC-10G-EP30.3=	1530.33 nm	SMF	50 km (31.1 miles)
ONS-XC-10G-EP31.1=	1531.12 nm	SMF	50 km (31.1 miles)
ONS-XC-10G-EP31.9=	1531.90 nm	SMF	50 km (31.1 miles)
ONS-XC-10G-EP32.6=	1532.68 nm	SMF	50 km (31.1 miles)
ONS-XC-10G-EP33.4=	1533.47 nm	SMF	50 km (31.1 miles)
ONS-XC-10G-EP34.2=	1534.25 nm	SMF	50 km (31.1 miles)
ONS-XC-10G-EP35.0=	1535.04 nm	SMF	50 km (31.1 miles)
ONS-XC-10G-EP35.8=	1535.82 nm	SMF	50 km (31.1 miles)
ONS-XC-10G-EP36.6=	1536.61 nm	SMF	50 km (31.1 miles)
ONS-XC-10G-EP37.4=	1537.40 nm	SMF	50 km (31.1 miles)
ONS-XC-10G-EP38.1=	1538.19 nm	SMF	50 km (31.1 miles)
ONS-XC-10G-EP38.9=	1538.98 nm	SMF	50 km (31.1 miles)
ONS-XC-10G-EP39.7=	1539.77 nm	SMF	50 km (31.1 miles)
ONS-XC-10G-EP40.5=	1540.56 nm	SMF	50 km (31.1 miles)
ONS-XC-10G-EP41.3=	1541.35 nm	SMF	50 km (31.1 miles)
ONS-XC-10G-EP42.1=	1542.14 nm	SMF	50 km (31.1 miles)
ONS-XC-10G-EP42.9=	1542.94 nm	SMF	50 km (31.1 miles)
ONS-XC-10G-EP43.7=	1543.73 nm	SMF	50 km (31.1 miles)
ONS-XC-10G-EP44.5=	1544.53 nm	SMF	50 km (31.1 miles)
ONS-XC-10G-EP45.3=	1545.32 nm	SMF	50 km (31.1 miles)
ONS-XC-10G-EP46.1=	1546.12 nm	SMF	50 km (31.1 miles)
ONS-XC-10G-EP46.9=	1546.92 nm	SMF	50 km (31.1 miles)

XFP	Wavelength	Fiber Type	Cable Distance
ONS-XC-10G-EP47.7=	1547.72 nm	SMF	50 km (31.1 miles)
ONS-XC-10G-EP48.5=	1548.51 nm	SMF	50 km (31.1 miles)
ONS-XC-10G-EP49.3=	1549.32 nm	SMF	50 km (31.1 miles)
ONS-XC-10G-EP50.1=	1550.12 nm	SMF	50 km (31.1 miles)
ONS-XC-10G-EP50.9=	1550.92 nm	SMF	50 km (31.1 miles)
ONS-XC-10G-EP51.7=	1551.72 nm	SMF	50 km (31.1 miles)
ONS-XC-10G-EP52.5=	1552.52 nm	SMF	50 km (31.1 miles)
ONS-XC-10G-EP53.3=	1553.33 nm	SMF	50 km (31.1 miles)
ONS-XC-10G-EP54.1=	1554.13 nm	SMF	50 km (31.1 miles)
ONS-XC-10G-EP54.9=	1554.94 nm	SMF	50 km (31.1 miles)
ONS-XC-10G-EP55.7=	1555.75 nm	SMF	50 km (31.1 miles)
ONS-XC-10G-EP56.5=	1556.55 nm	SMF	50 km (31.1 miles)
ONS-XC-10G-EP57.3=	1557.36 nm	SMF	50 km (31.1 miles)
ONS-XC-10G-EP58.1=	1558.17 nm	SMF	50 km (31.1 miles)
ONS-XC-10G-EP58.9=	1558.98 nm	SMF	50 km (31.1 miles)
ONS-XC-10G-EP59.7=	1559.79 nm	SMF	50 km (31.1 miles)
ONS-XC-10G-EP60.6=	1560.61 nm	SMF	50 km (31.1 miles)
ONS-XC-10G-EP61.4=	1561.43 nm	SMF	50 km (31.1 miles)

## Multimode Fiber XFP Port Cabling Specifications

The following table lists specifications for multimode fiber XFP port cabling.

**Table 22: Multimode Fiber XFP Port Cabling Specifications**

XFP	Wavelength	Fiber Type	Cable Distance
ONS-XC-8G-MM=	840 nm to 860 nm	MMF	—



XFP	Wavelength	Fiber Type	Cable Distance
ONS-XC-10G-SR-MM=	840 nm to 860 nm	MMF	26-300 m (0.1864 miles)
			OC-192STM64/10GE/10GFCOTU2

## CFP Description and Specifications

The C Form factor Pluggable (CFP) modules are hot-swappable I/O devices that plug into 40-Gigabit and 100-Gigabit Ethernet module ports. The CFP modules provide data rate up to 40 Gbps for ONS-CC-40G-LR4 or 100 Gbps for ONS-CC-100G-LR4.

CFP dimensions are:


- Height 0.53 inches (1.36 cm)
- Width 3.22 inches (8.2 cm)
- Depth 5.7 inches (14.48 cm)

The CFP module operating temperature range between 23 degrees Fahrenheit to 158 degrees Fahrenheit (–5 degrees Celsius to 70 degrees Celsius).

The 100 Gbps signal is carried over four wavelengths ( 1295.6 nm, 1300.1 nm, 1304.6 nm, and 1309.1 nm). Multiplexing and demultiplexing of the four wavelengths are managed within the device. The 40 Gbps signal is carried over four wavelengths ( 1271 nm, 1291 nm, 1311 nm, and 1331 nm). Multiplexing and demultiplexing of the four wavelengths are managed within the device.

The following figure shows a CFP module with a 12-fiber MPO connector.

**Figure 10: CFP with MPO Fiber Connector**

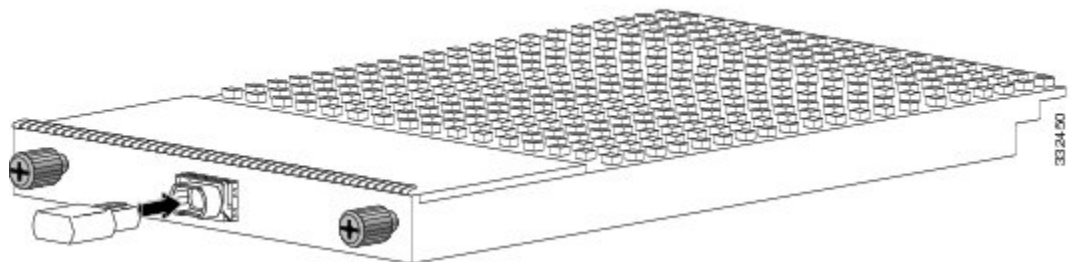

1	Captive installation screws	3	Transmit and receive multifiber optical bore, MPO/MTP connector
2	Optical bore dust plug		

**Note**

The MPO connectors on the optical CFP transceivers support network interface cables with either Physical Contact (PC) or Ultra-Physical Contact (UPC) flat polished face types. The MPO connectors on the optical CFP transceivers do not support network interface cables with an Angle Polished Connector (APC) polished face type.

## CFP Specifications

The following table lists specifications for available CFP modules.

**Table 23: CFP Specifications**

CFP	Interface	Transmitter Output Power Min/Max (dBm)	Receiver Input Power Min/Max (dBm)
ONS-CC-100G-LR4=	100GBASE-LR4	−4.3 to 4.5 per wavelength	−10.6 to 4.5 per wavelength
ONS-CC-40G-LR4=	40GBASE-LR4	−7 to 2.3 per wavelength	−13.7 to 2.3 per wavelength
	OTU3	−2.3 to 2.3 per wavelength	−9 to 2.3 per wavelength

## Single-Mode Fiber CFP Port Cabling Specifications

The following table provides cabling specifications for the SMF CFPs.

**Table 24: Single-Mode Fiber CFP Port Cabling Specifications**

CFP	Wavelength (nm)	Fiber Type	Cable Distance
ONS-CC-100G-LR4=	1310	SMF	10 km (6.2 miles)
ONS-CC-40G-LR4=	1310	SMF	10 km (6.2 miles)

## CXP Description and Specifications

The CXP pluggable transceiver modules has 12 dedicated transmit (Tx) channels and 12 receive (Rx) channels per transceiver with data rates up to 10.3125 Gbps and OTN rates up to 11.25 Gbps. The CXP module provides 2-wire serial (I2C) management interface and digital diagnostics, including Tx and Rx optical power monitoring per wavelength. The CXP module uses a 24-fiber MPO connector that supports bidirectional transmission across the fibers (12 Tx + 12 Rx). The following table lists the supported CXP-CFP MPO connectors:

**Table 25: Supported CXP-CFP MPO Connectors**

Cable	Description	Distance
ONS-CCC-100G-5=	CXP-CFP MPO connector	5 m (16.4 ft)
ONS-CCC-100G-10=	CXP-CFP MPO connector	10 m (32.8 ft)
ONS-CCC-100G-20=	CXP-CFP MPO connector	20 m (65.6 ft)

The CXP module operating temperature range between 23 degrees Fahrenheit to 158 degrees Fahrenheit (–5 degrees Celsius to 70 degrees Celsius).

## CXP Specifications

The following table lists specifications for available CXP.

**Table 26: CXP Specifications**

CXP	Interface	Transmitter Output Power Min/Max (dBm)	Receiver Input Power Min/Max (dBm)
ONS-CXP-100G-SR10=	100GBASE-SR10	–7.6 to –1 per wavelength	–9.5 to 2.4 per wavelength

## CXP Port Cabling Specifications

The following table provides cabling specifications for the MMF CXP.

**Table 27: Multimode Fiber CFP Port Cabling Specifications**

CXP	Wavelength (nm)	Fiber Type	Cable Distance
ONS-CXP-100G-SR10=	840 – 860	50.0 micron OM3	100 m (328 ft)
		50.0 micron OM4	300 m (984 ft)

## NTP-G324 Install, Provision, and Delete PPMs



### Warning

GBICs, SFP, SFP+, XFP, CXP, and CFP modules are Class I laser products. Statement 1008

**Warning**

Invisible laser radiation could be emitted from the end of the unterminated fiber cable or connector. Do not stare into the beam directly with optical instruments. Viewing the laser output with certain optical instruments (for example, eye loupes, magnifiers, and microscopes) within a distance of 100 mm could pose an eye hazard. Statement 1056

**Warning**

Ultimate disposal of this product should be handled according to all national laws and regulations. Statement 1040

**Warning**

Use of controls, adjustments, or performing procedures other than those specified may result in hazardous radiation exposure. Statement 1057

**Warning**

During this procedure, wear grounding wrist straps to avoid ESD damage to the card. Do not directly touch the backplane with your hand or any metal tool, or you could shock yourself. Statement 94

**Warning**

Before you install, operate, or service the system, read the Site Preparation and Safety Guide. This guide contains important safety information you should know before working with the system.

**Warning**

Only trained and qualified personnel should be allowed to install, replace, or service this equipment. Statement 148

**Warning**

To comply with the Telcordia GR-1089 NEBS standard for electromagnetic compatibility and safety, for Ethernet RJ-45 ports, use only shielded Ethernet cables that are grounded on both ends. In a NEBS installation, all Ethernet ports are limited to intra-building wiring. Statement 7012

**Warning**

Ethernet ports are intra-building ports and are suitable only for connecting to shielded cabling grounded at both ends. Statement 1084

**Caution**

Do not use GBICs, SFP, SFP+, XFP, CXP, and CFP modules from third-party vendors. Cisco TAC does not support third-party vendor GBICs, SFP, SFP+, XFP, CXP, and CFP modules. A third-party vendor GBICs, SFP, SFP+, XFP, CXP, and CFP modules is any GBICs, SFP, SFP+, XFP, CXP, or CFP module that is not sourced from Cisco directly, or via a Cisco Partner, or Cisco authorized seller. Cisco-sourced GBICs, SFP, SFP+, XFP, CXP, and CFP modules can be identified by the Cisco label and logo.

**Note**

GBICs and SFPs must be matched on either end by type: SX to SX, LX/LH to LX/LH, or ZX to ZX (GBIC).

**Note**

The shelf should be equipped with a CC-FAN if the copper SFP is installed on a MXP\_MR\_10DME card.

<b>Purpose</b>	This task installs, provisions, and deletes PPMs (GBICs, SFP, SFP+, XFP, CXP, and CFP modules) on the line cards. Because GBICs, SFP, SFP+, XFP, CXP, and CFP modules are hot-swappable, they can be installed and removed while the card/shelf assembly is powered and running.
<b>Tools/Equipment</b>	<ul style="list-style-type: none"> <li>• Wrist strap or other personal grounding device to prevent electro-static discharge (ESD) occurrences.</li> <li>• Antistatic mat or antistatic foam to set the PPM on.</li> <li>• Small flat-blade screwdriver for removing the CFP module socket cover.</li> <li>• Fiber-optic end-face cleaning tools and inspection equipment. For complete information on inspecting and cleaning fiber-optic connections, see the <a href="#">Inspection and Cleaning Procedures for Fiber-Optic Connections</a> document.</li> </ul>
<b>Prerequisite Procedures</b>	"NTP-G179 Install the TXP, MXP, AR_MXP, AR_XP, 100G-LC-C, 10x10G-LC, CFP-LC, ADM-10G, and OTU2_XP Cards" task in the chapter "Provision Transponder and Muxponder Cards" of <i>Cisco ONS 15454 DWDM Configuration Guide</i>
<b>Required/As Needed</b>	As needed
<b>Onsite/Remote</b>	Onsite
<b>Security Level</b>	Provisioning or higher

## Procedure

- Step 1** Install PPMs. Complete the necessary task as applicable:
- [DLP-G723 Install PPM on a Line Card](#), on page 62
  - [DLP-G724 Connecting Single-Mode and Multimode Optical Fiber](#), on page 67
- Step 2** Provision the PPM. Complete the necessary task as applicable:
- [DLP-G725 Preprovisioning PPM Slot](#), on page 67

- [DLP-G726 Preprovisioning a Multirate PPM](#), on page 68

**Step 3** Delete the PPM. Complete the necessary task as applicable:

- [DLP-G727 Delete PPM Provisioning](#), on page 70
- [DLP-G728 Remove PPM from the Line Card](#), on page 71

**Stop. You have completed this procedure.**

## DLP-G723 Install PPM on a Line Card

<b>Purpose</b>	This task installs PPM on a line card. The PPMs provide a fiber interface to the card.
<b>Tools/Equipment</b>	<ul style="list-style-type: none"> <li>• Wrist strap or other personal grounding device to prevent electro-static discharge (ESD) occurrences.</li> <li>• Antistatic mat or antistatic foam to set the PPM on.</li> <li>• Small flat-blade screwdriver for removing the CFP module socket cover.</li> <li>• Fiber-optic end-face cleaning tools and inspection equipment. For complete information on inspecting and cleaning fiber-optic connections, see the <a href="#">Inspection and Cleaning Procedures for Fiber-Optic Connections</a> document.</li> </ul>
<b>Prerequisite Procedures</b>	"NTP-G179 Install the TXP, MXP, AR_MXP, AR_XP, 100G-LC-C, 10x10G-LC, CFP-LC, ADM-10G, and OTU2_XP Cards" task in the chapter "Provision Transponder and Muxponder Cards" of <i>Cisco ONS 15454 DWDM Configuration Guide</i>
<b>Required/As Needed</b>	As needed
<b>Onsite/Remote</b>	Onsite
<b>Security Level</b>	Provisioning or higher



### Warning

GBICs, SFP, SFP+, XFP, CXP, and CFP modules are Class I laser products. Statement 1008

**Warning**

Because invisible laser radiation may be emitted from the aperture of the port when no cable is connected, avoid exposure to laser radiation and do not stare into open apertures. Statement 70

**Warning**

Ultimate disposal of this product should be handled according to all national laws and regulations. Statement 1040

**Warning**

Use of controls, adjustments, or performing procedures other than those specified may result in hazardous radiation exposure. Statement 1057

**Warning**

To comply with the Telcordia GR-1089 NEBS standard for electromagnetic compatibility and safety, connect the serial high-speed WAN interface ports only to intra-building or unexposed wiring or cable. The intrabuilding cable must be shielded and the shield must be grounded at both ends. The intra-building port(s) of the equipment or subassembly must not be metallically connected to interfaces that connect to the OSP or its wiring. These interfaces are designed for use as intra-building interfaces only (Type 2 or Type 4 ports as described in GR-1089-CORE) and require isolation from the exposed OSP cabling. The addition of Primary Protectors is not sufficient protection in order to connect these interfaces metallically to OSP wiring. Statement 7003

**Note**

- In case of a full C-band tunable XFP, it is mandatory to use optical cables that are fully compliant with NEBS Telcordia GR-326-CORE, Issue 3 recommendation. The Cisco patchcord indicated by the Cisco Transport Planner (CTP) tool is fully compliant with NEBS Telcordia GR-326-CORE, Issue 3 recommendation.
- The CC-FTA fan tray assembly must be installed in a shelf where CWDM and DWDM SFPs or XFPs are used.
- If you have installed a fan tray lower than CC-FTA on the MSTP unit, you must have the TXP\_MR\_10E transponder card (only if you have installed ONS-XC-10G-L2 XFP on the TXP\_MR\_10E card) installed in Slot 5, 6, 12, or 13. This limitation does not exist for fan-tray versions higher than CC-FTA.

G-Series cards manufactured before August 2003 do not support DWDM GBICs. The G1K-4 cards compatible with DWDM GBICs have a CLEI code of WM5IRWPCAA.

All versions of G1K-4 cards support CWDM GBICs.

## Procedure

- Step 1** Verify that the GBICs, SFP, SFP+, XFP, CXP, or CFP module is correct for your network. Ensure that you are installing compatible GBICs, SFP, SFP+, XFP, CXP, or CFP module, for example, SX to SX or LX/LH to LX/LH.
- Step 2** Remove the PPM from its protective packaging.
- Step 3** Check the label to verify that the PPM is the correct type for your network.  
[Table 2: Compatibility by Card—Cisco ONS 15454 M2 and Cisco ONS 15454 M6 Platforms, on page 5](#) through [Table 7: Compatibility by Card—Cisco ONS 15600 and Cisco ONS 15600 SDH, on page 22](#) shows the available GBICs, SFP, XFP, CFP, and CXP modules.
- The GBICs are very similar in appearance. Check the GBIC label carefully before installing it.
  - Before you install SFPs on the MRC-2.5G-4 or MRC-12 card, see the MRC2.5G-4 or MRC-12 card information in the *Cisco ONS 15454 Reference Manual* for bandwidth restrictions based on the port where you want to install the SFP, and the cross-connect card being used.
- Step 4** Verify the type of PPM you are using:
- If you are using a GBIC with clips, go to [Step Step 5](#).
  - If you are using a GBIC with a handle, go to [Step Step 6](#).
  - If you are using SFP, SFP+, XFP, CFP, or CXP, go to [Step Step 7](#).
  - If you are using CFP module, go to [Step Step 8](#).
- Step 5** Install GBICs with clips. Perform the following:
- a) Grip the sides of the GBIC with your thumb and forefinger and insert the GBIC into the slot on the card.  
**Note** GBICs are keyed to prevent incorrect installation.
  - b) Slide the GBIC through the flap that covers the opening until you hear a click. The click indicates the GBIC is locked into the slot.  
 In a noisy environment the click may not be audible. Verify that the GBIC is in locked position by carefully pulling it without touching the release latch. If the GBIC is locked, it does not come out.  
**Caution** To avoid loss of traffic due to incorrect locking of the GBIC, ensure that it is locked properly.
  - c) When you are ready to attach the network fiber-optic cable, remove the protective plug from the GBIC, then plug the fiber connector into the GBIC. Save the plug for future use.
- Step 6** Install GBICs with a handle. Perform the following:
- a) Remove the protective plug from the SC-type connector. Save the plug for future use.
  - b) Grip the sides of the GBIC with your thumb and forefinger and insert the GBIC into the slot on the card.
  - c) Lock the GBIC into place by closing the handle down. The handle is in the correct closed position when it does not obstruct access to the SC-type connector.
  - d) Slide the GBIC through the cover flap until you hear a click. The click indicates that the GBIC is locked into the slot.  
 In a noisy environment the click may not be audible. Verify that the GBIC is in locked position by carefully pulling it without touching the release latch. If the GBIC is locked, it does not come out.  
**Caution** To avoid loss of traffic due to incorrect locking of the GBIC, ensure that it is locked properly.



- e) When you are ready to attach the network fiber-optic cable, see the [DLP-G724 Connecting Single-Mode and Multimode Optical Fiber](#), on page 67 section.

**Step 7** Install the SFP, SFP+, XFP, or CXP module. Perform the following:

- a) Plug the LC duplex connector of the fiber into the SFP, SFP+, XFP, or CXP module.
- b) If you are installing ONS-SC-EOP1, ONS-SC-EOP3, ONS-SC-E1-T1-PW, ONS-SC-E3-T3-PW, ONS-SC-E1-T1-CES, or ONS-SC-E3-T3-CESFP, set the dual in-line package (DIP) switches to the desired operation mode as specified in the following table.  
The ONS-SC-EOP1, ONS-SC-EOP3, ONS-SC-E1-T1-PW, ONS-SC-E3-T3-PW, ONS-SC-E1-T1-CES, and ONS-SC-E3-T3-CES SFPs include a 2-section DIP switch used to select one of the following working modes of the device:

- Database initialization
- Normal operation (default setting)
- Software download
- Configuration

On the underside of the ONS-SC-EOP1, ONS-SC-EOP3, ONS-SC-E1-T1-PW, ONS-SC-E3-T3-PW, ONS-SC-E1-T1-CES, or ONS-SC-E3-T3-CES SFP, set the DIP switches as listed in the following table to enable the desired working mode.

**Table 28: DIP Switch Settings for ONS-SC-EOP1, ONS-SC-EOP3, ONS-SC-E1-T1-PW, ONS-SC-E3-T3-PW, ONS-SC-E1-T1-CES, or ONS-SC-E3-T3-CES SFP**

Switch Position SW1	Switch Position SW2	Function
OFF	OFF	Database initialization
OFF	ON	Normal operation (default setting)
ON	OFF	Software download
ON	ON	Configuration

- c) Attach the fiber-optic cable to the SFP, SFP+, XFP, or CXP. For more information, see the [DLP-G724 Connecting Single-Mode and Multimode Optical Fiber](#), on page 67
- d) If the new SFP, SFP+, XFP, or CXP module has a latch, close the latch over the cable to secure it.
- e) Plug the cabled SFP, SFP+, XFP, or CXP into the slot until it clicks.
- For a mylar tab SFP, SFP+, XFP, or CXP—Slide the SFP, SFP+, XFP, or CXP into the slot.
  - For an actuator/button SFP, SFP+, XFP, or CXP—Slide the SFP, SFP+, XFP, or CXP all the way into the slot.
  - For a bail clasp SFP, SFP+, XFP, or CXP—Latch (flip upwards) the bail clasp before inserting the SFP, SFP+, XFP, or CXP into the slot and then slide it into the slot.

A click indicates that the SFP, SFP+, XFP, or CXP module is locked into the port. In a noisy environment the click may not be audible. Verify that the SFP, SFP+, XFP, or CXP is in locked position by carefully


pulling it without touching the release latch. If the SFP, SFP+, XFP, or CXP is locked, it does not come out.

**Caution** To avoid loss of traffic due to incorrect locking of the SFP, SFP+, XFP, or CXP module, ensure that it is locked properly.

**Note**

- SFP, SFP+, XFP, and CXP modules are keyed to prevent incorrect installation.
- During the installation of the CXP module in the 100G-LC-C or 10x10G-LC card, orient the CXP module so that the polarization notch aligns with the polarization key on the CXP module. See the following diagram.

**Figure 11: CXP Module Installation**

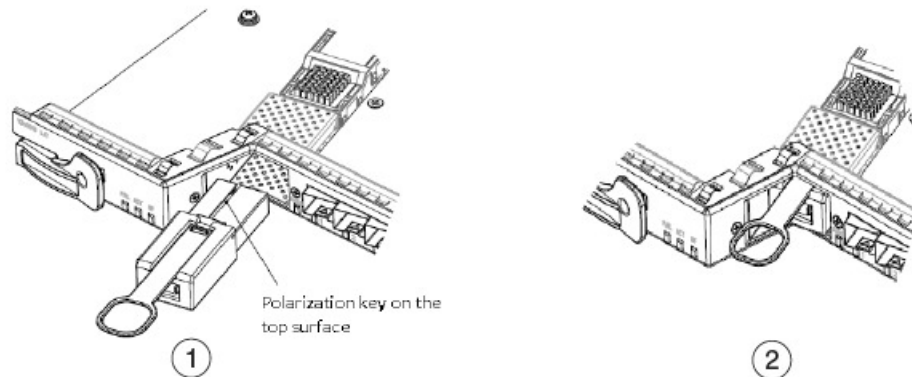

SFP, SFP+, XFP, or CXP modules must be provisioned in CTC. If you install a multirate PPM, complete the [DLP-G726 Preprovisioning a Multirate PPM, on page 68](#) task. (Single-rate XFPs do not need to be provisioned in CTC.)

**Step 8** Install CFP module. Perform the following:

**Caution** The CFP module is a static-sensitive device. Always use an ESD wrist strap or similar individual grounding device when handling the CFP modules or coming into contact with the modules.

- Remove the CFP module from its protective packaging.
- Check the label on the CFP module body to verify that you have the correct model for your network.
- Remove the dust plug from the CFP module module optical port and set it aside.
- Align the CFP device into the transceiver port socket of your card, and slide it in until the CFP module EMI gasket flange makes contact with the card faceplate.
- Press firmly on the front of the CFP module with your thumb to fully seat it in the transceiver socket.
- Gently tighten the two captive installation screws on the transceiver to secure the CFP module in the socket.
- Reinstall the dust plug into the CFP module's optical bore until you are ready to attach the network interface cable.
- When you are ready to attach the network cable interface, remove the dust plugs and inspect and clean fiber connector end faces, and then immediately attach the network interface cable connectors into the CFP module optical bores.

**Step 9** Return to your originating procedure (NTP).

## DLP-G724 Connecting Single-Mode and Multimode Optical Fiber

To connect the single-mode or multimode optical fiber, attach the appropriate optical fiber cable directly to the SC-type receptacle on the GBIC or the LC-type connector on the SFP, SFP+, or XFP module. You can use either simplex or duplex connectors for most devices. For simplex connectors, two cables are required, one cable for transmit (Tx) and a second cable for receive (Rx). For duplex connectors, only one cable that has both Tx and Rx connectors is required.

<b>Purpose</b>	This task connects the single-mode or multimode optical fiber for GBICs, SFP, SFP+, and XFP modules installed on the line cards.
<b>Tools/Equipment</b>	None
<b>Prerequisite Procedures</b>	None
<b>Required/As Needed</b>	As needed
<b>Onsite/Remote</b>	Onsite
<b>Security Level</b>	Provisioning or higher

### Procedure

- Step 1** Remove the protective plugs from the GBICs, SFP, SFP+, and XFP module and save them for future use.
- Step 2** Remove the protective caps from the connectors on the fiber-optic cable and save them for future use.
- Step 3** Clean fiber-optic connectors on fiber-optic cables.
- Step 4** Plug the fiber-optic cable into the SC-type receptacle on the GBIC or the LC-type connector on the SFP, SFP+, or XFP module.
- Step 5** Return to your originating procedure (NTP).

## DLP-G725 Preprovisioning PPM Slot

<b>Purpose</b>	This task preprovisions PPM (GBIC, SFP, SFP+, XFP, CXP, or CFP) slot.
<b>Tools/Equipment</b>	None
<b>Prerequisite Procedures</b>	"DLP-G46 Log into CTC" in the <a href="#">Connect the PC and Log into the GUI</a> document.
<b>Required/As Needed</b>	As needed
<b>Onsite/Remote</b>	Onsite or remote

Security Level	Provisioning or higher
----------------	------------------------

**Note**

GBICs, SFP, SFP+, XFP, CXP, and CFP modules are generically called PPMs in CTC. After installing multirate GBICs, SFP, SFP+, XFP, CXP, and CFP modules, multirate PPMs must be provisioned in CTC. To complete the provisioning of the multirate pluggable port, complete the [DLP-G726 Preprovisioning a Multirate PPM, on page 68](#) task.

**Procedure**

- Step 1** In node view (single-shelf mode) or shelf view (multishelf mode), double-click the card where you want to provision PPM settings.
- Step 2** Click the **Provisioning > Pluggable Port Modules** tabs.
- Step 3** In the Pluggable Port Modules area, click **Create**. The Create PPM dialog box appears.
- Step 4** In the Create PPM dialog box, complete the following:
  - PPM—Choose the slot number where the GBIC, SFP, SFP+, XFP, CXP, or CFP module is installed, from the drop-down list.
  - PPM Type—Choose the number of ports supported by your GBIC, SFP, SFP+, XFP, CXP, or CFP module, from the drop-down list. The drop-down list displays the number of PPMs that are available for provisioning. If only one port is supported, PPM (1 port) is the only option.
- Step 5** Click **OK**. The newly created port appears in the Pluggable Port Modules pane. The row in the Pluggable Port Modules pane turns light blue. The Actual Equipment Type column remains blank until the actual GBIC, SFP, SFP+, XFP, CXP, or CFP module is installed. After the GBIC, SFP, SFP+, XFP, CXP, or CFP module is installed, the row in the pane turns white and the Actual Equipment Type column shows the equipment name.
 

**Note** For ONS-SC-EOP1, ONS-SC-EOP3, ONS-SC-E1-T1-PW, ONS-SC-E3-T3-PW, ONS-SC-E1-T1-CES, and ONS-SC-E3-T3-CES SFPs, set the port rate as FE.
- Step 6** Verify that the PPM appears in the list in the Pluggable Port Modules pane. If it does not, repeat [Step Step 3](#) through [Step Step 5](#).
- Step 7** Repeat [Step Step 2](#) through [Step Step 5](#) to provision a second PPM, if needed. If not, continue with [Step Step 8](#).
- Step 8** Click **OK**.
- Step 9** Return to your originating procedure (NTP).

## DLP-G726 Preprovisioning a Multirate PPM

Purpose	This task provisions a multirate PPM on a line card.
Tools/Equipment	None

<b>Prerequisite Procedures</b>	"DLP-G46 Log into CTC" in the <a href="#">Connect the PC and Log into the GUI</a> document.
<b>Required/As Needed</b>	As needed
<b>Onsite/Remote</b>	Onsite or remote
<b>Security Level</b>	Provisioning or higher

**Note**

If the PPM was preprovisioned using the [DLP-G725 Preprovisioning PPM Slot, on page 67](#) task, this task is unnecessary, unless the PPM has an Out-of-Service and Autonomous Management, Unassigned (ANSI) or Unlocked-disabled, unassigned (ETSI) service state.

### Procedure

- Step 1** In node view (single-shelf mode) or shelf view (multishelf view), double-click the line card where you want to provision the multirate PPM settings.
- Step 2** If this is the first multirate PPM provisioned for the card, continue with [Step 3](#). If not, complete the following steps.
  - a) Click the **Provisioning > Line > SONET (ANSI) or SDH (ETSI)** tabs.
  - b) Locate the Trunk port table row and verify that the Service State column value is OOS-MA,DSBLD (ANSI) or Locked-enabled,disabled (ETSI). If yes, continue with [Step 3](#). If not, continue with the following step.
  - c) Click the **Admin State** table cell and choose **OOS-MA,DSBLD (ANSI) or Locked-enabled,disabled**.
  - d) Click **Apply**, then **Yes**.
- Step 3** Click the **Provisioning > Pluggable Port Modules** tabs.
- Step 4** In the Pluggable Port Modules area, click **Create**. The Create PPM dialog box appears.
- Step 5** In the Create PPM dialog box, complete the following:
  - PPM—Choose the slot number where the multirate PPM is installed, from the drop-down list.
  - PPM Type—Choose the number of ports supported by your multirate PPM from the drop-down list. If only one port is supported, PPM (1 port) is the only option.
- Step 6** Click **OK**. The newly created port appears in the Pluggable Port Modules area. The row in the Pluggable Port Modules area turns white and the Actual Equipment Type column lists the equipment name.
- Step 7** If you want to provision a PPM on another port, repeat [Step 3](#) through [Step Step 5](#).
- Step 8** Return to your originating procedure (NTP).

## DLP-G727 Delete PPM Provisioning

- Before deleting a PPM, delete the PPM from the provisioning pane.
- This task does not apply to the TXP\_MR\_10G card. To change the TXP\_MR\_10G data rate, see the section "DLP-G365 Provision the TXP\_MR\_10G Data Rate" in the chapter "Provision Transponder and Muxponder Cards" of *Cisco ONS 15454 DWDM Configuration Guide*.
- You cannot delete a PPM if the TXP, MXP, AR\_MXP, AR\_XP, GE\_XP, 10GE\_XP, GE\_XPE, 10GE\_XPE, or ADM-10G card is part of a regenerator group. For OTU2\_XP card, you cannot delete a PPM if the card configuration is in Standard Regen or Enhanced FEC mode.

<b>Purpose</b>	This task deletes PPM provisioning for GBICs, SFP, SFP+, XFP, CXP, and CFP modules installed on the line cards.
<b>Tools/Equipment</b>	None
<b>Prerequisite Procedures</b>	"DLP-G46 Log into CTC" in the <a href="#">Connect the PC and Log into the GUI</a> document.
<b>Required/As Needed</b>	As needed
<b>Onsite/Remote</b>	Onsite or remote
<b>Security Level</b>	Provisioning or higher

### Procedure

- 
- Step 1** In node view (single-shelf mode) or shelf view (multishelf view), double-click the line card where you want to delete PPM settings.
- Step 2** Verify that the PPM port Service State is OOS,DSBLD. If it is not OOS,DSBLD, follow the tasks in "NTP-G128 Manage Pluggable Port Modules" in the chapter "Provision Transponder and Muxponder Cards" of *Cisco ONS 15454 DWDM Configuration Guide* to change the Service State of the PPM port to OOS,DSBLD.
- Step 3** Click the **Provisioning > Pluggable Port Modules** tabs.
- Step 4** To delete a PPM and the associated ports, perform the following:
- a) In the Pluggable Port Modules area, click the PPM that you want to delete. The highlight changes to dark blue.
  - b) Click **Delete**. The Delete PPM dialog box appears.
  - c) Click **Yes**. The PPM provisioning is removed from the Pluggable Port Modules area and the Pluggable Ports area.

**Note** You cannot delete a PPM until its port is in the OOS,DSBLD (ANSI) or Locked-enabled,disabled (ETSI) state. You cannot delete a client port if the client is in the In Service and Normal (IS-NR) (ANSI) or Unlocked-enabled (ETSI) service state, is in a protection group, has a generic communications channel (GCC) or data communications channel (DCC), is a timing source, has circuits or overhead circuits, or transports Link Management Protocol channels or links. You can delete a client port (except the last port) if the trunk port is in service and the client port is in the OOS,DSBLD (ANSI) or Locked-enabled,disabled (ETSI) service state. You can delete the last client port only if the trunk port is in a OOS,DSBLD (ANSI) or Locked-enabled,disabled (ETSI) service state for all cards except the MXP\_MR\_2.5G, MXPP\_MR\_2.5G, MXP\_MR\_10DME\_C, MXP\_MR\_10DME\_L, and MXP\_MR\_10DMEX\_C cards. For more information about port states, see the [Administrative and Service States](#) document.

**Step 5** Verify that the PPM provisioning is deleted:

- In the card view, CTC shows an empty port after the PPM is deleted.
- If the PPM is physically present when you delete the PPM provisioning, CTC transitions to the deleted state, the ports (if any) are deleted, and the PPM is represented as a gray graphic in CTC. The PPM can be provisioned again in CTC, or the equipment can be removed. If the equipment is removed, the graphic disappears.

**Step 6** (Optional) If you need to remove the PPM hardware, complete the [DLP-G728 Remove PPM from the Line Card](#), on page 71.

**Step 7** Return to your originating procedure (NTP).

## DLP-G728 Remove PPM from the Line Card

<b>Purpose</b>	This task removes PPMs from the line cards.
<b>Tools/Equipment</b>	<ul style="list-style-type: none"> <li>• Wrist strap or other personal grounding device to prevent electro-static discharge (ESD) occurrences.</li> <li>• Antistatic mat or antistatic foam to set the PPM on.</li> <li>• Small flat-blade screwdriver for removing the CFP module socket cover.</li> <li>• Fiber-optic end-face cleaning tools and inspection equipment. For complete information on inspecting and cleaning fiber-optic connections, see the <a href="#">Inspection and Cleaning Procedures for Fiber-Optic Connections</a> document.</li> </ul>
<b>Prerequisite Procedures</b>	None
<b>Required/As Needed</b>	As needed
<b>Onsite/Remote</b>	Onsite
<b>Security Level</b>	Provisioning or higher

**Warning**

GBICs, SFP, SFP+, XFP, CXP, and CFP modules are Class I laser products. Statement 1008

**Warning**

Because invisible laser radiation may be emitted from the aperture of the port when no cable is connected, avoid exposure to laser radiation and do not stare into open apertures. Statement 70

**Warning**

Ultimate disposal of this product should be handled according to all national laws and regulations. Statement 1040

**Note**

- This task removes the GBICs, SFP, SFP+, XFP, CXP, and CFP hardware. To delete the provisioning for GBICs, SFP, SFP+, XFP, CXP, and CFP, see the [DLP-G727 Delete PPM Provisioning, on page 70](#) task.
- Removing a PPM from the client ports of a Y-cable protection group card causes an IMPROPRMVL (PPM) alarm. The working port raises the CR,IMPROPRMVL,SA alarm and the protected port raises the MN,IMPROPRMVL,NSA alarm. The severity on the client ports is changed according to the protection switch state.

## Procedure

- Step 1** Disconnect the network fiber cable from the PPM connector. If the GBICs, SFP, SFP+, XFP, CXP, and CFP connector has a latch securing the fiber cable, pull it upward to release the cable.
- Step 2** Remove PPM. Perform the following as necessary:
- To remove GBIC with clips, go to [Step Step 3](#).
  - To remove GBIC with a handle, go to [Step Step 4](#).
  - To remove SFP, SFP+, or XFP module, go to [Step Step 5](#).
  - To remove CFP module, go to [Step Step 6](#).
- Step 3** Remove GBIC with clips. Perform the following:
- a) Release the GBIC from the slot by squeezing the two plastic tabs on each side of the GBIC.
  - b) Slide the GBIC out of the slot. A flap closes over the slot to protect the connector on the Gigabit Ethernet card.
- Step 4** Remove GBIC with a handle. Perform the following:
- a) Release the GBIC by opening the handle.
  - b) Pull the handle of the GBIC.



- c) Slide the GBIC out of the slot. A flap closes over the slot to protect the connector on the Gigabit Ethernet card.

**Step 5** Remove SFP, SFP+, or XFP module. Perform the following:

- a) If the SFP, SFP+, or XFP connector has a latch securing the fiber cable, pull it upward to release the cable.
- b) Pull the fiber cable straight out of the connector.
- c) Release the SFP, SFP+, or XFP module from the slot by performing one of the following actions (depending on which latch is on the SFP, SFP+, or XFP):
  - For a mylar tab SFP, SFP+, or XFP—Pull out the mylar tab.
  - For an actuator/button SFP, SFP+, or XFP—Press the actuator/button.
  - For a bail clasp SFP, SFP+, or XFP—Unlatch the bail clasp and swing it downward.

- d) Slide the SFP, SFP+, or XFP module out of the slot.

**Step 6** Remove CFP module. Perform the following:

**Caution** The CFP module is a static-sensitive device. Always use an ESD wrist strap or similar individual grounding device when handling the CFP modules or coming into contact with the modules.

- a) Disconnect the network fiber-optic cable from the CFP transceiver connectors. Immediately reinstall the dust plugs in the CFP transceiver optical bores.
- b) Loosen the two captive installation screws that secure the CFP to the networking module.
- c) Slide the CFP transceiver out of the module socket. Immediately place the CFP transceiver in antistatic protective packaging.

**Step 7** Return to your originating procedure (NTP).

---

## Related Documentation

Use this document in conjunction with the following referenced publications as needed:

- *Cisco ONS 15454 DWDM Configuration Guide*
- *Cisco ONS 15454 DWDM Procedure Guide*
- *Cisco ONS 15454 DWDM Reference Manual*
- *Cisco ONS 15454 DWDM Troubleshooting Guide*
- *Cisco ONS 15454 Procedure Guide*
- *Cisco ONS 15454 Reference Manual*
- *Cisco ONS 15454 Troubleshooting Guide*
- *Cisco ONS 15454 SDH Procedure Guide*
- *Cisco ONS 15454 SDH Reference Manual*
- *Cisco ONS 15454 SDH Troubleshooting Guide*
- *Cisco ONS 15310-CL and Cisco ONS 15310-MA Procedure Guide*
- *Cisco ONS 15310-CL and Cisco ONS 15310-MA Reference Manual*

- *Cisco ONS 15310-CL and Cisco ONS 15310-MA Troubleshooting Guide*
- *Cisco ONS 15310-MA SDH Procedure Guide*
- *Cisco ONS 15310-MA SDH Reference Manual*
- *Cisco ONS 15310-MA SDH Troubleshooting Guide*
- *Cisco ONS 15600 Procedure Guide*
- *Cisco ONS 15600 Reference Manual*
- *Cisco ONS 15600 Troubleshooting Guide*
- *Cisco ONS 15600 SDH Procedure Guide*
- *Cisco ONS 15600 SDH Reference Manual*
- *Cisco ONS 15600 SDH Troubleshooting Guide*
- *Regulatory Compliance and Safety Information for Cisco CPT and Cisco ONS Platforms*

## Additional References

### Related Documents

Use this document in conjunction with the other release-specific documentation listed in the following pages:

Link	Description
<a href="#">Cisco ONS Documentation Roadmap</a>	Provides quick access to publications of Cisco ONS releases.
<a href="#">Cisco ONS 15454 DWDM Configuration Guide</a>	Provides background and reference material, procedures for installation, turn up, provisioning, and maintenance of Cisco ONS 15454, Cisco ONS 15454 M2, and Cisco ONS 15454 M6 dense wavelength division multiplexing (DWDM) systems.
<a href="#">Cisco ONS 15454 DWDM Troubleshooting Guide</a>	Provides general troubleshooting instructions, alarm troubleshooting instructions, and a list of error messages that apply to the Cisco ONS 15454, Cisco ONS 15454 M2, and Cisco ONS 15454 M6 dense wavelength division multiplexing (DWDM) systems.

**Technical Assistance**

Link	Description
<a href="http://www.cisco.com/support">http://www.cisco.com/support</a>	<p>The Cisco Support website provides extensive online resources, including documentation and tools for troubleshooting and resolving technical issues with Cisco products and technologies.</p> <p>To receive security and technical information about your products, you can subscribe to various services, such as the Product Alert Tool (accessed from Field Notices), the Cisco Technical Services Newsletter, and Really Simple Syndication (RSS) Feeds.</p> <p>Access to most tools on the Cisco Support website requires a Cisco.com user ID and password.</p>

## Trademark Notice

Cisco and the Cisco logo are trademarks or registered trademarks of Cisco and/or its affiliates in the U.S. and other countries. To view a list of Cisco trademarks, go to this URL: <http://www.cisco.com/go/trademarks>. Third-party trademarks mentioned are the property of their respective owners. The use of the word partner does not imply a partnership relationship between Cisco and any other company. (1110R)

## Obtaining Documentation and Submitting a Service Request

For information on obtaining documentation, submitting a service request, and gathering additional information, see the monthly *What's New in Cisco Product Documentation*, which also lists all new and revised Cisco technical documentation, at:

<http://www.cisco.com/en/US/docs/general/whatsnew/whatsnew.html>

Subscribe to the *What's New in Cisco Product Documentation* as a Really Simple Syndication (RSS) feed and set content to be delivered directly to your desktop using a reader application. The RSS feeds are a free service and Cisco currently supports RSS version 2.0.

