

PS8-300ATX

80 Plus Bronze 300W PS/2 Single Power Supply




Input	Voltage	90 ~ 264 V _{AC}
	Frequency	47 ~ 63 Hz
	Input Current	8 Amp R.M.S Max. @ 100 V _{AC} full load 4 Amp R.M.S Max. @ 200 V _{AC} full load
Output		+3.3 V @ 16 A (0 A min) +5 V @ 19 A (0.5 A min) +12 V @ 11 A (0.1 A min) +12 V _{cpu} @ 11.5 A (0.1 A min) -12 V @ 0.3 A -5 V @ 0.3 A +5 Vsb @ 2 A
	Watt	300W
	PFC	Active
	MTBF	100,000 hours
	Temperature	Operating : 0 to 50° C Non-Operating : -40 to 80° C
	Humidity	Operating : Operating : 8% to 90% RH, non-condensing Non-Operating : 8% to 95% RH, non-condensing*
General Spec.	Dimension	86 x 150 x 140 mm (3.39" x 5.91" x 5.51")
	Output Connector	20+4P ATX *1
		PATA *4
		FDD *2
		SATA *2
4P 12V *1		



Dimensions

Unit: mm

CONNECTOR	HOUSING	TERMINAL	PVC WIRE
P14K 864P2 20+4P	864P2-402021A	BT CA020P2	
		BT CA020P2	
		BT CA020P2	
		BT CA020P2	
P14P14K Single/PS/2	P14P14K-010001	BT CA020P2	UL 100T
		BT CA020P2	AWG18
		BT CA020P2	
		BT CA020P2	
PC1T PS/2	P14P14K-010001	BT CA020P2	UL 100T
		BT CA020P2	AWG18
		BT CA020P2	
		BT CA020P2	
PC1H Single/SATA	P14P14K-010001	BT CA020P2	UL 100T
		BT CA020P2	AWG18
		BT CA020P2	
		BT CA020P2	
R Mod/4P	P14P14K-010001	BT CA020P2	UL 100T
		BT CA020P2	AWG18
		BT CA020P2	
		BT CA020P2	

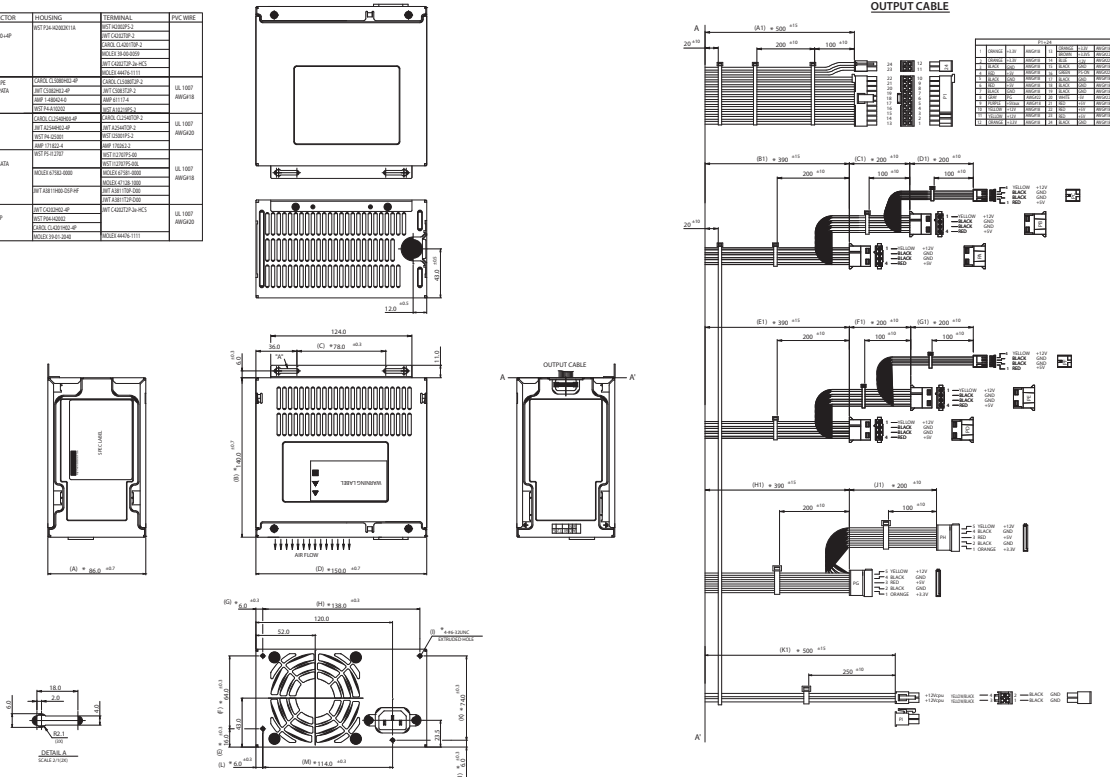

Ordering Information

Part Number	Description
PS8-300ATX-ZBE	80 Plus Bronze 300W PS/2 Single Power Supply