

SERENITY - LED DOUBLE SIDED PANEL



VERDE LED
ENERGY SAVING LIGHTING SOLUTIONS



FEATURES & BENEFITS

- High quality construction
- 30% upward / 70% downward light distribution
- Ultra thin & light

Mechanical:

Ingress Protection: IP20 as standard. (Driver IP20)

Construction: Ultra slim and light Alu frame.

Mounting: Suspended.

Working Temperature: -20°C - +40°C

Electrical:

Input Voltage: 220-240VAC (50-60Hz).

Power Factor: 0.9

Driver: Lifud external.

Photometric:

CCT: 4000K as standard (3000K, 5000K 6500K available on request).


Beam Options: 104°

CRI: 80

LED Light Source: Epistar

Lumen Maintenance: L70B10 > 50,000 hrs.

Dimensions:

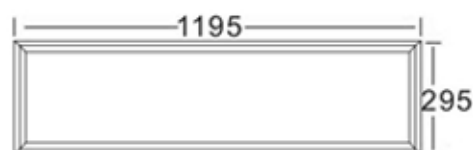

Certifications:



CODE	POWER	CCT	LUMINOUS FLUX	DIMENSIONS
VER-DS30120-42-840	42W	4000K	3,275 lm	1195x29x9 mm

* Specifications subject to change without notice.