


X10DRC-T4+

Products > Motherboards > Xeon® Boards > [X10DRC-T4+]

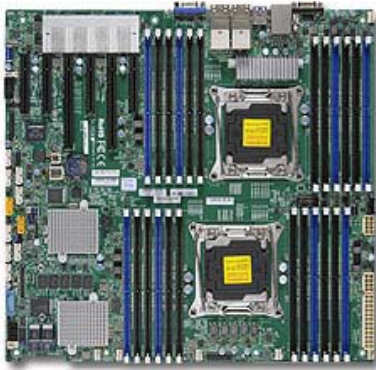

Key Features

1. Dual socket R3 (LGA 2011) supports Intel® Xeon® processor E5-2600 v3 family; QPI up to 9.6GT/s
2. Intel® C612 chipset
3. Up to 1.5TB ECC DDR4 2133MHz; 24x DIMM sockets
4. 2x PCI-E 3.0 x16, 3x PCI-E 3.0 x8, and 1x PCI-E 2.0 x4 (in x8) slot
5. Quad LAN w/ Intel® X540 10GBase-T
6. 10x SATA3 (6Gbps) ports w/ Intel C612 controller; RAID 0, 1, 5, 10
7. 8x SAS3 (12Gbps) ports w/ LSI 3108 controller; RAID 0, 1, 5, 6, 10, 50, 60 SuperCap option support
8. Integrated IPMI 2.0 and KVM with Dedicated LAN
9. 3x USB 3.0 (2 rear, 1 Type A)

Links & Resources

- [▶ Tested Memory List](#)
- [▶ Tested HDD / SSD List](#)
- [▶ Motherboard Manual](#)
- [▶ Update Your BIOS](#)
- [▶ IPMI Firmware](#)
- [▶ Download the Latest Drivers and Utilities](#)
- [▶ Download Driver CD](#)
- [▶ Heat Sink Compatibility](#)
- [▶ OS Compatibility](#)

Specifications

Product SKUs	
MBD-X10DRC-T4+ -B	▪ X10DRC-T4+ (Bulk Pack)
MBD-X10DRC-T4+ -P	▪ X10DRC-T4+ (Retail Pack)
Physical Stats	
Form Factor	▪ Enhanced Extended ATX
Dimensions	▪ 13.68" x 13" (34.74cm x 33cm)
Processor/Cache	
CPU	▪ Intel® Xeon® processor E5-2600 v3 family (up to 145W TDP **) ▪ Dual Socket R3 (LGA 2011)
Cores / Cache	▪ Up to 18 Cores / Up to 45MB Cache
System Bus	▪ QPI up to 9.6 GT/s
Note	** Motherboard supports this maximum TDP. Please verify your system can thermally support.
System Memory	
Memory Capacity	▪ 24x 288-pin DDR4 DIMM sockets ▪ Up to 1.5TB ECC LRDIMM, 768GB ECC RDIMM
Memory Type	▪ 2133/1866/1600MHz ECC DDR4 SDRAM 72-bit
DIMM Sizes	▪ RDIMM: 32GB, 16GB, 8GB, 4GB ▪ LRDIMM: 64GB, 32GB
Memory Voltage	▪ 1.2 V
Error Detection	▪ Corrects single-bit errors
On-Board Devices	
Chipset	▪ Intel® C612 Express chipset
SATA	▪ SATA3 (6Gbps); RAID 0, 1, 5, 10
SAS	▪ LSI 3108 SAS3 (12Gbps) controller; HW RAID 0, 1, 5, 6, 10, 50, 60 ▪ 2GB Cache with optional SuperCap backup module ▪ Support for Intelligent Platform

Chassis (Optimized for X10DRC-T4+)	
2U Chassis:	▪ SC826BE1C-R920LPB
3U / Mid-Tower Chassis:	▪ SC835BTQ-R1K28B ▪ SC836BE1C-R920B
4U / Tower Chassis:	▪ SC745TQ-R920B ▪ SC847BE1C-R1K28LPB
Important Chassis Notes	▪ To support the new generation Intel® Xeon® processor-based motherboards, Revision M chassis is recommended. Please talk to your sales representative for details.
Expansion Slots	
PCI-Express	▪ 2x PCI-E 3.0 x16 ▪ 3x PCI-E 3.0 x8 ▪ 1x PCI-E 2.0 x4 (in x8)
System BIOS	
BIOS Type	▪ 128Mb SPI Flash EEPROM with UEFI BIOS
BIOS Features	▪ Plug and Play (PnP) ▪ APM 1.2 ▪ PCI 2.3 ▪ ACPI 1.0 / 2.0 / 3.0 / 4.0 ▪ USB Keyboard support ▪ SMBIOS 2.7.1 ▪ UEFI 2.3.1
Management	
Software	▪ Intel® Node Manager 3.0 ▪ IPMI 2.0 ▪ NMI ▪ SMCBU and SMM ▪ SuperDoctor® 5 ▪ Watch Dog
Power Configurations	▪ ACPI Power Management ▪ Power-on mode for AC power recovery
PC Health Monitoring	

IPMI	<ul style="list-style-type: none"> Management Interface v.2.0 IPMI 2.0 with virtual media over LAN and KVM-over-LAN support ASPEED AST2400 BMC
Network Controllers	<ul style="list-style-type: none"> Intel® X540 Quad Port 10GBase-T Virtual Machine Device Queues reduce I/O overhead Supports 10GBase-T, 100BASE-TX, and 1000BASE-T, RJ45 output 1x Realtek RTL8211E PHY (dedicated IPMI)
Video	<ul style="list-style-type: none"> ASPEED AST2400 BMC Video resolution up to 1920x1200 @ 60Hz 32BPP
Input / Output	
SATA	<ul style="list-style-type: none"> 10x SATA3 (6Gbps) ports
SAS	<ul style="list-style-type: none"> 8x SAS3 (12Gbps) ports SuperCap option support
LAN	<ul style="list-style-type: none"> 4x RJ45 10GBase-T ports 1x RJ45 Dedicated IPMI LAN port
USB	<ul style="list-style-type: none"> 3x USB 3.0 ports (2 rear + 1 Type A)
Video	<ul style="list-style-type: none"> 1x VGA Connector
Serial Port / Header	<ul style="list-style-type: none"> 2x Fast UART 16550 serial 2x COM Ports (1 rear, 1 header)
DOM	<ul style="list-style-type: none"> 2x SuperDOM (Disk on Module) ports
TPM	<ul style="list-style-type: none"> 1x TPM 1.2 20-pin Header

Voltage	<ul style="list-style-type: none"> Monitors for CPU Cores, +1.8V, +3.3V, +5V, +12V, +3.3V Standby, +5V Standby, VBAT, Memory Voltages. 5+1 Phase-switching voltage regulator
FAN	<ul style="list-style-type: none"> 8x 4-pin fan headers (up to 8 fans) 8x fans with tachometer monitoring Status monitor for speed control Pulse Width Modulated (PWM) fan connectors
Temperature	<ul style="list-style-type: none"> Monitoring for CPU and chassis environment CPU thermal trip support Thermal Control for 8x Fan Connectors Thermal Monitor 2 (TM2) support PECI
LED	<ul style="list-style-type: none"> CPU / System Overheat LED Suspend static indicator LED UID/Remote UID
Other Features	<ul style="list-style-type: none"> Chassis intrusion detection Chassis intrusion header SDDC Support RoHS
Operating Environment	
Operating Temperature Range	<ul style="list-style-type: none"> 10°C - 35°C (50°F - 95°F)
Non-Operating Temperature Range	<ul style="list-style-type: none"> -40°C - 70°C (-40°F - 158°F)
Operating Relative Humidity Range	<ul style="list-style-type: none"> 8% - 90% (non-condensing)
Non-Operating Relative Humidity Range	<ul style="list-style-type: none"> 5% - 95% (non-condensing)

Note: For optimized or compatible chassis, additional parts may be required, please check with Supermicro sales rep

Parts List

Parts List (Bulk)			
	Part Number	Qty	Description
X10DRC-T4+	MBD-X10DRC-T4+	1	X10DRC-T4+ Motherboard
I/O Shield	MCP-260-00042-0N	1	STD I/O shield for X9 socket R server MB with Gasket
I/O Cables	CBL-0044L	2	SATA CABLE 61CM FLAT S-S PBF

Parts List (Retail)			
	Part Number	Qty	Description
X10DRC-T4+	MBD-X10DRC-T4+	1	X10DRC-T4+ Motherboard
I/O Shield	MCP-260-00042-0N	1	STD I/O shield for X9 socket R server MB with Gasket
I/O Cables	CBL-0044L	2	SATA CABLE 61CM FLAT S-S PBF
I/O Cables	CBL-SAST-0532	2	Internal Mini-SAS HD to Mini-SAS HD 50cm,30AWG,12Gb/s
Quick Reference Guide	MNL-1560-QRG	1	Quick Reference Guide

Optional Parts List			
	Part Number	Qty	Description
Heat Sink (optional, not included)	-	-	CPU Heat Sink reference
TPM security module (optional, not included)	AOM-TPM-9655V or AOM-TPM-9655H	-	TPM module with Infineon 9655, RoHS/REACH,PBF; Vertical or Horizontal depends on the server
SuperDOM	-	-	Supermicro SATA DOM Solutions [Details]
SuperCap TFM module	BTR-TFM8G-LSICVM02	-	SuperCap TFM module
I/O Cables	CBL-SAST-0532	2	Internal Mini-SAS HD to Mini-SAS HD 50cm,30AWG,12Gb/s,HF,RoHS/REACH,PBF

Terms & Conditions | Privacy | Investor Relations | Jobs | Site Map
 SuperServer® | Motherboard | Chassis | Rack Cabinet | SuperBlade® | Embedded | Networking | Storage | Accessories | AMD Solution | Power Supplies

Copyright © 2014 Super Micro Computer, Inc.

Information in this document is subject to change without notice.
 Other products and companies referred to herein are trademarks or registered trademarks of their respective companies or mark holders.